

**TIMBER VS. COMPOSITE/PLASTIC PILE FENDER SYSTEMS IN PEARL HARBOR  
MAINTENANCE COST COMPARISON**

**A PLAN B PAPER SUBMITTED TO THE DEPARTMENT OF OCEAN ENGINEERING  
OF THE UNIVERSITY OF HAWAII IN PARTIAL FULFILLMENT OF THE  
REQUIREMENTS FOR THE DEGREE OF**

**MASTER OF SCIENCE**

**IN**

**OCEAN ENGINEERING**

**DECEMBER 1996**

**By**

**Joseph Alling**

**Committee:**

**Kwok Fai Cheung, Chairman  
Hans - Jurgen Krock  
Amarjit Singh**

**19970129 009**

**DTIC QUALITY INSPECTED**

**DISTRIBUTION STATEMENT A**

**Approved for public release;  
Distribution Unlimited**

|  |  |                   |                          |
|--|--|-------------------|--------------------------|
| AD NUMBER  |  | DATE<br>15 Jan 97 | DTIC ACCESSION<br>NOTICE |
| 1. REPORT IDENTIFYING INFORMATION  |  | REQUESTER:        |                          |
| A. ORIGINATING AGENCY<br>NAVAL POSTGRADUATE SCHOOL, MONTEREY, CA 93943   |  | 1. Put y<br>on re |                          |
| B. REPORT TITLE AND/OR NUMBER<br>TIMBER VS. COMPOSITE/PLASTIC PILE FENDER<br>SYSTEMS IN PERARL HARBOR MAINTENANCE COST |  | 2. Com,           |                          |
| C. MONITOR REPORT NUMBER U. Hawaii<br>ALLING, Joseph Thesis Dec 1996   |  | 3. Attar<br>ma    |                          |
| D. PREPARED UNDER CONTRACT NUMBER<br>N00123-89-G-0551  |  | 4. Use<br>inf     |                          |
| 2. DISTRIBUTION STATEMENT  |  | 5. Do,<br>foi     |                          |
| APPROVED FOR PUBLIC RELEASE;<br>DISTRIBUTION UNLIMITED   |  | DTIC              |                          |
|  |  | 1. As             |                          |
|  |  | 2. Ri             |                          |

19970129 009

DTIC Form 50  
DEC 91

PREVIOUS EDITIONS ARE OBSOLETE

## Abstract

The Navy has traditionally used treated timber materials for fender systems for piers and wharves in Pearl Harbor. In recent years, the costs associated with the use of timber have escalated and the Navy has begun to use plastic piles at installations around the world to replace timber fender systems. Plastic fender systems are more expensive, but have greater energy absorption capabilities and are more resilient to environmental decay. To determine whether plastic piles are a cost saving alternative to treated timber, the present study compiled and evaluated existing technical data, maintenance/construction records and inspection reports from various Navy staff civil engineer offices and at the Navy Public Works Center Pearl Harbor (PWC). Since records at these various locations were not designed to present associated cost/maintenance data in a format suitable for an economic analysis, field surveys of over 3 miles of waterfront in Pearl Harbor and interviews with staff civil engineers and wharf building branch managers at PWC were conducted to supplement existing historical data. Through the gathered data, the maintenance costs of timber pile fenders are estimated and compared to those of composite plastic piles using manufacturers' quotes and from reports compiled by the Navy Civil Engineering Laboratory (NCEL). For the expected life cycles of timber piles observed in Pearl Harbor this analysis shows the proposed plastic system to be more cost effective for shore facilities with remaining service lives of greater than ten years.

## Table of Contents

|  |    |
|--|----|
| Abstract .....   | ii |
| List of Figures .....                                    | iv |
| List of Tables .....                                     | v  |
| Acknowledgment .....                                     | vi |
| 1 Background .....                                       | 1  |
| 2 Introduction .....                                     | 3  |
| 2.1 General Background .....                             | 3  |
| 2.2 General Designs .....                                | 4  |
| 2.3 Timber Fender Systems in Pearl Harbor .....          | 5  |
| 3. Timber Pile Fender Life Cycle Estimation .....        | 9  |
| 3.1 Timber Failure Modes .....                           | 9  |
| 3.1.1 Marine Borer and Insect Attack .....               | 9  |
| 3.1.2 Shrinkage Damage .....                             | 10 |
| 3.1.3 Fastener Corrosion .....                           | 10 |
| 3.1.4 Abrasion Damage .....                              | 11 |
| 3.1.5 Overloading .....                                  | 11 |
| 3.2 Maintenance Record Review .....                      | 11 |
| 3.3 Inspection Record Review .....                       | 12 |
| 3.4 Engineering Study Review .....                       | 12 |
| 3.5 Life Cycle Estimation .....                          | 14 |
| 4. Plastic/Composite Fender Systems .....                | 16 |
| 4.1 Proposed Plastic/Composite Pile Fender Systems ..... | 16 |
| 4.2 Estimated Life Cycle .....                           | 17 |
| 5. Capital/Maintenance Costs .....                       | 18 |



|  |    |
|--|----|
| 5.1 Estimated Capital/Maintenance Costs .....  | 18 |
| 5.2 Economic Analysis Methodology .....  | 20 |
| 5.3 Capital/Maintenance Cost Comparison .....  | 23 |
| 6. Conclusions.....  | 26 |
| 7. Recommendations .....   | 28 |
| References .....   | 34 |
| List of Interviews.....  | 36 |
| Appendix A - Field Survey Results and Existing Timber Fender Material Quantities ... | 37 |
| Appendix B - Fender Replacement Activity Cost Estimation .....                       | 64 |
| Appendix C - Fender Maintenance Economic Analysis.....                               | 69 |

## List of Figures

|   |  |    |
|---|--|----|
| 1 | General Timber Fender System Designs .....                       | 30 |
| 2 | Typical Surface Vessel Timber Fender System - Pearl Harbor ..... | 31 |
| 3 | Typical Submarine Timber Fender System - Pearl Harbor .....      | 31 |
| 4 | Total Costs (no recycling) vs. Remaining Design Life .....       | 32 |
| 5 | Total Costs (recycling) vs. Remaining Design Life .....          | 33 |

## List of Tables

|   |   |    |
|---|---|----|
| 1 | Surveyed Timber Fender System Layouts - Pearl Harbor.....                     | 7  |
| 2 | Estimated Existing Timber Fender Material Quantities - Pearl Harbor .....     | 8  |
| 3 | Structural Specifications - Plastic vs. Timber .....                          | 17 |
| 4 | Quoted Fender Material Costs .....  | 18 |
| 5 | Pile Replacement Activity Costs and Totals for a 10 Pile Job .....            | 19 |
| 6 | Timber vs. Plastic Fender Accumulated Replacement Cost Comparison .....       | 24 |
| 7 | Cost Comparison Results - Plastic (25 yr. Life) vs. Timber (3 yr. Life) ..... | 24 |
| 8 | Cost Comparison Results - Plastic (25 yr. Life) vs. Timber (5 yr. Life) ..... | 25 |

## Acknowledgment

I would like to thank all members of the following commands who helped me during the course of this project: Commander In Chief Pacific Fleet, Navy Public Works Center Pearl Harbor, Naval Facilities Engineering Command Pacific Division, Commander Naval Base Pearl Harbor, Naval Station Pearl Harbor and Submarine Base Pearl Harbor. The following people were especially helpful to me during this project: CDR Karin Lynn, CDR Mark Claussen, LCDR Jeff Hoel, Al Emond, Wayne Kekumu, and Donald Kam. Without their help the research for this project could not have been accomplished.

I would also like to thank my committee and the Faculty and Staff of the Ocean Engineering Department, especially Dr. Kwok Fai Cheung for their support, flexibility and understanding throughout my work on this project and throughout my Ocean Engineering program.

## 1. Background

During a 26 July 1996 meeting with CDR Lynn & LCDR Weisenburger of Commander in Chief Pacific Fleet (CINCPACFLT) Facilities Department interest was expressed in determining whether the use of the latest composite/plastic piling systems was of a cost saving alternative to the Navy in comparison to the traditional timber pilings for fender systems in Pearl Harbor. There is a debate whether it is more cost effective to use composite/plastic piles in the construction of fender systems in Pearl Harbor as opposed to the timber piles over a specific time period. The composite/plastic piles are more expensive and, therefore, incur a much greater capital cost over timber piles. The plastic/composite piles, however, are supposedly much more durable than their timber counterparts, which could save on recurring maintenance costs.

Further interest in this subject was expressed during meetings with both CDR Claussen, Commander Naval Base (COMNAVBASE) Pearl Harbor Staff Civil Engineer, and CDR Bengtson, Navy Public Works Center (PWC) Pearl Harbor Production Officer, on 28 August 1996. It seems that the use of treated timber piles is becoming more and more difficult due to environmental and Occupational Safety and Health Administration (OSHA) requirements. Also, plastic piles have recycling capabilities in Hawaii. Preliminary study for a specific facility has indicated that the use of plastic piles will be more cost effective than timber piles (Matsuda, 1996). Both CDR Claussen and CDR Bengtson suggested a more comprehensive study is needed to determine the most cost saving alternative.

There is information on construction and maintenance costs of fender systems for piers and wharves in the Pearl Harbor area, but this information is not compiled or organized in any usable form. The information can be found at various separate staff civil

engineer offices and commands in the Pearl Harbor area. To date, no attempt has been made to compile and analyze this information. The objective of the present study is to compile and analyze existing data on timber usage, material costs, construction costs, failure characteristics and disposal costs in determining the costs vs. benefits of switching to composite/plastic piles. The analysis performed in this study would be of tremendous use to the Navy in determining the most efficient use of maintenance/construction dollars for pile supported fender systems for piers and wharves in Pearl Harbor.

## 2. Introduction

### 2.1 General Background

A fender system is a structural system which stands between a berthed ship and the pier or wharf (shore facility). The fender system is designed to absorb or dissipate the impact energy during the berthing of a ship without causing permanent damage to the ship or the shore facility. Once the ship is successfully berthed and moored to the shore facility, the fender system continues to provide the interface between ship and shore and transmits the environmental loads (wind, waves and current) on the ship to the structure. For submarine and other low-profile ship berthing, the fender system also provides a physical barrier to prevent the vessel from going underneath the pier and causing a major accident.

The fender design chosen to protect a particular pier or wharf is highly dependent on the berthing practice employed at the particular naval facility. Typically, large ships are expected to be brought into berth assisted by two or more tug boats. Smaller ships in some locations may be allowed to come in on their own power. When assisted by tugs, the ship would arrive off the berth and parallel to it. The ship then fully stops in the water and the tugs push and pull the ship transversely toward the berth to make as much contact with the fender system as possible. When unassisted by tugs, the smaller ship will be eased into its berth at some slight angle, referred to as the angle of approach. In this case, the initial contact is limited to a relatively small portion of the fender system.

Most Navy ships are berthed against separators placed between the vessel and the fender system. This practice is the most significant difference between commercial ship berthing and naval ship berthing. For aircraft carrier and submarine berthing,

separators are mandatory. For surface combatant ships, even though separators are not needed, they are preferred to direct the berthing forces at the waterline (where the ship is strongest). Berthing against separators, which are usually floating camels, concentrates the impact energy to a small length of the fender system as well as applies the energy at some distance below the deck. This aspect is recognized in all fender system designs for Navy ships. Fender systems designed for commercial ships do not usually meet the standard required for the berthing of Navy ships (MIL-HDBK-1025/1, 1994).

## 2.2 General Designs

According to the military handbook, "Piers and Wharfs" (MIL-HDBK-1025/1, 1994) the Navy uses timber fender systems for both surface and submarine vessels berthing along concrete shore facilities. The specific fender design is driven by the unique requirements of each class of vessel and the structural requirements of the shore facility, but the general design is based on two typical configurations on piers and wharves constructed of concrete. The first configuration is based on the use of driven piles (see Figure 1) and the second uses a "hanging" configuration (see Figure 1). These two configurations cater to different types of vessels which apply berthing loads at different elevations, i.e. submarines apply loads well below the free surface as opposed to surface vessels applying loads at the free surface.

The driven pile configuration employs timber pile systems to absorb the loads induced by vessels. The piles are usually driven to a specific depth to provide sufficient resistance to the design loads. The piles are attached to the bull rail and columns (see Figure 1) of the shore facility by a supporting structure made up of timber members such as walers, chocks and blocks. These supporting members are designed to maintain the pile position during loading and are designed for a specific pile layout and



shore facility configuration. The members are usually connected together by boring and bolting. The walers are designed to: spread the load induced on a single pile over a greater length of the bull rail, act as a mounting area for chocks, and provide a convenient mounting arrangement to the pier or wharf. The chocks act as separators between adjacent piles. The blocks are used as separators between the waler and the bull rail. The timber fender system is tied to the bull rail by 'T' bolts which are inserted and turned to produce a mechanical attachment through the waler into the concrete bull rail.

### 2.3 Timber Fender Systems in Pearl Harbor.

The general timber fender designs outlined above were reconfigured to meet the specific berthing requirements and shore facility designs in Pearl Harbor. The Pearl Harbor shore facility locations which employ timber fender systems include Naval Station (NAVSTA), Submarine Base (SUBASE), Fleet Industrial Supply Center (FISC) and the Naval Shipyard (NSYD). In order to classify these specific configurations site visit surveys of existing timber fender systems covering over 3 miles of waterfront were conducted on 22, 23 and 27 September 1996. Each facility was inspected and the specific fender arrangement was documented (see Appendix A).

Some typical Pearl Harbor timber fender systems are shown in Figures 3 and 4. From this survey, it was evident that there are basically three configurations of timber fender systems presently employed in Pearl Harbor. These configurations are specified in Table 1. The first timber fender configuration is a driven pile system. This configuration slightly varies at different locations in Pearl Harbor basically by the placement and/or number of piles, walers, chocks and blocks as discussed in the military handbook (MIL-HBK-1025/1, 1994). The second configuration is a "hanging pile" design which ties the timber pile system to two points on the shore facility, one at the bull rail and the other

on a column section and was only observed at the "Mike" docks (M 1-4) on Naval Station Pearl Harbor (NAVSTA). The third configuration is basically one of the two aforementioned timber systems employed as a secondary system to a primary fender system. This arrangement can be found in areas of the shore facility at which a permanent berthing location has been assigned. These primary systems, which are designed for larger vessels, usually employ other types of fender systems, such as pneumatic floating systems with either concrete pile or steel sheet pile backing in some areas. The timber are used to berth smaller vessels and prevent equipment and debris from moving under the pier or wharf where they can cause damage to the shore facility.

Some of the existing timber fender systems at these commands are being demolished and replaced by Military Construction Projects (MILCON) or retrofitted using other types of fender systems. From the site visit surveys conducted on 22, 23 and 27 September 1996, an existing timber fender material quantity take off estimation was performed (Appendix A). The estimated quantities for each group of the shore facilities is summarized in Table 2. It was estimated that there are 4,715 piles along 19,480 linear feet of shoreline. There also are approximately 23,159 linear feet of 12"x12" timber walers, 18,667 linear feet of 8"x12" chocks and 4,146 linear feet of 4"x12" block. The most popular fender design seems to be the driven type with a single upper waler, chock, block layout. The pile distance on center seems to vary, but is usually around 5' on center. The initial goal of this survey was to survey all the facilities using timber fender systems in Pearl Harbor. The only areas in Pearl Harbor not surveyed were West Lock and areas operated by NSYD, due to restricted access.

| <b>Facility</b> | <b>Fender Type (timber)</b>            | <b>Pile Size &amp; Layout</b>                    | <b>Waler Size &amp; Layout</b>    | <b>Chock Size &amp; Layout</b>   | <b>Tie-in/Block Size &amp; Layout</b> |
|-----------------|--|--|-----------------------------------|----------------------------------|---------------------------------------|
| B 22 - 26       | driven pile                            | 14"-18" @ 4'-6' oc. w/ 9 pile clusters @ 60' oc. | 12"x12" upper & or lower (varies) | 8"x12" upper & or lower (varies) | tie-in @ 6' w/ 4"x12" block           |
| M 1-2           | hanging pile 7.5' length               | 14" @ 3.5' oc.                                   | 12"x12" upper & lower             | 8"x12" upper & lower             | tie-in @ 6' w/ 4"x12" block           |
| M 3-4           | hanging pile 7.5' length & combination | 14" @ 3.5' oc.                                   | 12"x12" upper & lower             | 8"x12" upper & lower             | tie-in @ 6' w/ 4"x12" block           |
| S 1A-1B         | driven pile & combination              | 14" @ 4.5' oc.                                   | 12"x12" upper & lower             | 8"x12" upper & lower             | tie-in @ 5' w/ 4"x12" block           |
| S 4-5           | driven pile & combination              | 14" @ 3' oc.                                     | 12"x12" upper                     | 8"x12" upper                     | tie-in @ 8.5' w/ 4"x12" block         |
| S 8-9           | driven pile                            | 14" @ 2'-6' oc.                                  | 12"x12" upper                     | 8"x12" upper                     | tie-in @ 9' w/ 4"x12" block           |
| S 10-14         | driven pile                            | 14" @ 2'-7.75' oc.                               | 12"x12" upper & or lower (varies) | 8"x12" upper & or lower (varies) | tie-in @ 5' w/ 4"x12" block           |
| S 15-21         | driven pile                            | 14" @ 2'-5' oc.                                  | 12"x12" upper & or lower (varies) | 8"x12" upper & or lower (varies) | tie-in @ 5' or 9' w/ 4"x12" block     |
| K 3-10          | driven pile                            | 14" @ 5' oc.                                     | 12"x12" upper                     | 8"x12" upper                     | tie-in @ 5' w/ 4"x12" block           |
| F 1             | driven pile                            | 14" @ 5.5' oc. w/ 9 pile clusters @ 50' oc.      | 12"x12" upper                     | 8"x12" upper                     | tie-in @ 6.5' w/ 4"x12" block         |
| F 9-10          | driven pile                            | 14" @ 5' oc.                                     | 12"x12" upper                     | 8"x12" upper                     | tie-in @ 6' w/ 4"x12" block           |
| F 12-13         | driven pile                            | 14" @ 5' oc.                                     | 12"x12" upper                     | 8"x12" upper                     | tie-in @ 5' w/ 4"x12" block           |

**Table 1 - Surveyed Timber Fender System Layouts - Pearl Harbor**

| <b>Facility</b>        | <b>Fender Type:<br/>timber pile</b> | <b>Waterfront<br/>Using<br/>Timber<br/>Fenders (lf)</b> | <b>14"-18"<br/>Timber<br/>Piles</b> | <b>12"x12"<br/>Timber<br/>(lf)</b> | <b>8"x12"<br/>Timber<br/>(lf)</b> | <b>4"x12"<br/>Timber<br/>(lf)</b> |
|------------------------|-------------------------------------|---|-------------------------------------|------------------------------------|-----------------------------------|-----------------------------------|
| B 22 - 26              | driven                              | 2762  | 876                                 | 2454                               | 2221                              | 293                               |
| M 1-4                  | hanging &<br>combination            | 1374  | 393                                 | 2748                               | 2290                              | 137                               |
| S 1A-1B                | driven &<br>combination             | 1100  | 206                                 | 2200                               | 1941                              | 220                               |
| S 4-5                  | driven &<br>combination             | 668   | 221                                 | 618                                | 417                               | 76                                |
| S 8-9                  | driven                              | 763   | 204                                 | 683                                | 532                               | 90                                |
| S 10-14                | driven                              | 1277  | 400                                 | 1060                               | 982                               | 720                               |
| S 15-21                | driven                              | 4118  | 836                                 | 5046                               | 3695                              | 994                               |
| K 3-10                 | driven                              | 4251  | 863                                 | 4886                               | 3894                              | 977                               |
| F 1, 9, 10,<br>12-13   | driven                              | 3167  | 716                                 | 3464                               | 2695                              | 639                               |
| <b>Surveyed Totals</b> |                                     | <b>19,480</b>   | <b>4,715</b>                        | <b>23,159</b>                      | <b>18,667</b>                     | <b>4,146</b>                      |

**Table 2 - Estimated Existing Timber Fender Material Quantities - Pearl Harbor**

### 3. Timber Pile Life Cycle Estimation

#### 3.1 Timber Failure Modes.

Timber fenders in Pearl Harbor are subject to deterioration from decay or rot, attack by marine borers and insects, splitting and checking brought about by drying shrinkage or by the alternate wetting and drying cycle within the splash zone, corrosion of connections, abrasion, and overloading. The following modes of failure have been observed in Pearl Harbor.

3.1.1 Marine borer and insect attack. Marine borer attack is a very serious problem for timber structures in the splash and submerged zones. The destructive effects of two large groups of marine invertebrates, the Teredo, commonly called shipworms, and the Limnoria, commonly called woodgribbles have been documented (CHESDIV 55-94(147), 1994). Shipworms (Teredo) are mollusks and are distantly related to the oyster and the clam. Shipworm species are found in nearly all saltwater harbors and oceans of the world, except for the colder waters of the Arctic and Antarctic regions.

Infant shipworms float with the tides and either attach themselves to fixed objects or die. Should they settle on submerged timber during the first 48 hours of their life, they begin to change in physical appearance, with the body elongating, while tow clam like shells begin to auger into the wood. As the shipworm begins to burrow and grow, it becomes more worm like in appearance. In time the shipworm orients its body parallel to the grains of the timber member. Eventually, the interior of the pile will become completely riddled with burrows, although externally no evidence of attack is apparent. The original hole in the surface of the timber created by the infant shipworm is no larger than the diameter of a pinhead.

Woodgribbles are crustaceans related distantly to the crab and shrimp family. They are quite small, averaging only 1/8 to 1/4 inch in length. This tiny organism is a voracious wood chewer, with its appendages and mouth developed for rasping and biting. Infant woodgribbles are released onto or inside the submerged timber member at birth. Ordinarily woodgribbles do not burrow deep inside the timber surface but limit their attack to shallow surface trenches. In timber piling, this results in a slow but continual reduction in pile diameter. Damage is most frequently found at the water or mud lines, where the woodgribble population is the greatest. Severe attack can reduce the outside diameter of an untreated pine or Douglas fir by up to 6 inches in 1 year (NAVFAC P-990).

Termites are the most destructive type of insect life to attack above water. They feed on cellulose matter contained in timber. Timbers most subject to attack are wales, chocks and blocks.

**3.1.2 Shrinkage Damage.**       Drying causes timber to shrink. After installation this drying process continues, especially in hot dry climates, and the timber members split and check. This shrinkage also causes bolts to loosen in connections which, in turn, causes slippage and deflections in timber members and even distortion and weakening of the entire assembly.

Splitting and checking create an opening in the timber face or end that is an ideal means of access for insects and borers. These openings also tend to accumulate moisture and dirt, which can also easily lead to decay.

**3.1.3 Fastener Corrosion.**       Due to the extremely corrosive effects of saltwater, the steel connections used in timber fender construction are susceptible to deterioration. This effect can be retarded by using galvanized steel bolts, washers and nuts.

3.1.4 Abrasion Damage. Abrasion damage is usually caused at the interface of camels and timber piles while a vessel is at berth. The camel rubs against the seaward side of the piles, in response to constant pitching and yawing motion of the vessel induced by wave action. This rubbing wears away of the outer fibers of the timber pile, thus exposing the less well treated inner fibers of the wood. This exposure is usually exploited by woodgribbles, which accelerate the rate of deterioration of the pile. This deterioration cycle is extremely destructive because the piles are being weakened at an area where concentrated horizontal loads are transferred to the fender by the camel (MIL-HDBK-1025/1, 1994).

3.1.5 Overloading. Bending failure of piles due to overloading may occur when the vessel is at berth or during berthing operations. Wind pressure on a vessel is transferred to the fender system. While the vessel is berthed by keeping the vessel at berth beyond the design wind speed may result in excessive loading on the fender piles. During berthing operations, accidental impact of a vessel on the fender system is another cause of pile structural failure. This type of loading is particularly damaging due to the large energies with the moving mass of the vessel. This was observed at various locations in Pearl harbor where relatively new piles had been broken by vessels coming into berth at speeds too great for the design fender energy absorption capacity.

### 3.2 Maintenance Record Review

During investigations and interviews at various commands it became evident that no maintenance records were being kept which could be used to conduct a maintenance cost analysis of timber fender systems. This finding was echoed by a past study conducted by the Naval Audit Service (Audit Report, 1985). These offices had financial records which gave information on repair project costs, but these records could not be used to determine life cycles of timber fender systems for the following reasons:

1. Damaged piles and locations are identified in the records along with quantities of support members (walers, chock, block) but, during repair work, PWC may have to replace more material than originally planned. This is due to further fender damage occurring between the time of initial estimation and the start time of repair work. This time period could be 1 month or longer. According to these records it is not clear exactly which piles/components were actually replaced and when.
2. The records that are being kept are more or less used for accounting purposes and do not specify cost, materials and life cycle data in a format conducive to a maintenance analysis. Also, costs of projects are recorded under Job Order Numbers, in which costs for several projects are sometimes recorded using the same Job Order Number.

### 3.3 Inspection Record Review.

Inspection records were also studied to determine whether any timber fender documentation was made. However, these inspections did not usually cover the fender systems of the shore facilities, their focus was on the structural members of the piers and wharves, which were usually concrete or steel. But, an inspection report conducted in 1994 at SUBASE (CHESDIV, 1994) documented deterioration of timber fender pilings. This report showed the influence of marine borer attack on the piles. But, no estimation was made concerning the rate of deterioration. Thus, the life cycle of timber piles could not be determined from any existing inspection records.

### 3.4 Engineering Study Review.

A review of some of the engineering studies on file at various Naval Commands at Pearl Harbor were of value in confirming the information gathered during interviews with



regard to failure modes and estimated life cycle of timber fender piles. The most prevalent failure modes documented were overloading and biological deterioration (Ferver Engineering, 1980; and Audit Report, 1985)

At warm water Naval installations, biological deterioration of timber fender systems is a serious problem. The commonly used treatment of 20 lbs of creosote per timber pile has not proven effective against Limnoria attack and dual treatment apparently causes an embrittlement of the timber (Ferver Engineering, 1980). It was reported that a life expectancy as brief as 2-3 years can be expected (Ferver Engineering, 1980). Others reported that biological deterioration is not a problem because ship caused breakage occurs first<sup>1,4</sup> (see List of Interviews). This may be only partly correct. Because of the ability of Limnoria to gain entrance to the interior of the piling through cracks and small holes in the wood, detection is difficult or impossible until surface destruction is visible. According to the Ferver Engineering report, during an incident at the San Diego Naval Station, several apparently sound single treated fender piling which had been in place 3.5 years were broken. Close inspection revealed substantial Limnoria infestation and damage to the interior of the piling. While the incident involved ship berthing impact, the impaired strength of the piling was a contributing cause without which breakage might not have occurred.

A study conducted by the PWC Pearl suggested a life cycle of 5 years for timber fender piles (Matsuda, 1996). A report from the Naval Engineering Service Center (NFESC) quoted engineers from the Port of Los Angeles estimating the usable life of a timber pile to be 3-8 years (Hoy, 1995). The study conducted by the Naval Audit Service used a conservative estimate of 8 years for the expected life of a timber pile in Pearl Harbor (Audit Report, 1985). All of the aforementioned studies reported that the major disadvantage of this timber system is the biological deterioration of the timber piling in the sea water environment.

### 3.5 Life Cycle Estimation.

Since quantitative inspection/maintenance data on timber fender systems was not found for timber systems in Pearl Harbor, other sources of information concerning failure modes and life cycles of timber fender systems were sought. The aforementioned engineering studies were augmented by a series of interviews with marine construction and facilities maintenance personnel to gather data through observation and experience with timber fender systems in Pearl Harbor. It was determined from the information provided by these interviews that the range of usable life of a timber pile in Pearl Harbor is between 3 and 5 years<sup>1,6,7</sup>. This range was specified for failures precipitated by environmental deterioration of the timber pile. The major disadvantage of this timber system is the biological deterioration of the timber piling in the sea water environment.

One other approach was considered in the life cycle analysis. This approach was to estimate the average number of piles that are being replaced per year. Therefore, by estimating the number of piles presently in use as fender systems, it would be possible to derive the average life cycle of a timber pile. This approach did not produce tangible results. It is estimated that 350 piles per year are being replaced in the Pearl Harbor area. The following variables make it impossible to derive a life cycle. These piles are only being replaced in critical berthing areas. The lack of available money due to budget constraints, limits the fenders which are replaced. Thus, more piles are deteriorating per year than are being replaced. Also, the piles that are being replaced include piles, which may be relatively new but are damaged due to berthing loads beyond the design load of the fender system. This approach could be used very effectively if the historical records are kept concerning the replacement of piles for these critical berthing areas.

Information provided concerning operational (loading) failure suggested that no range or average life span could be determined. It was stated that operational failures were of a random nature<sup>1,4,6</sup>. Operational failures of timber fender systems cannot be predicted from existing data because no records exist. Damage due to vessels is random in nature and depends on such factors as: fender system design, type of vessel berthed, frequency of use of a particular fender system, vessel/tug pilot experience, facility location (predominant leeward or windward loading), and seasonal weather conditions. It was concluded that no estimation can be made regarding operational failure of timber piles<sup>1,4,5,6</sup>.

Since operational failure was determined to be random and that environmental decay is the primary weakness of timber systems, It was concluded that the life span of timber fender systems is 3 - 5 years in Pearl Harbor waters.

## 4. Plastic/Composite Fender Systems

### 4.1 Proposed Plastic/Composite Fender Systems.

According to reports from the Naval Facilities Engineering Service Center (NFESC) the Navy is researching several composite/plastic type fender pile configurations. These configurations include structural pipe cores, concrete filled fiberglass shells, fiberglass and steel reinforced plastic piles and combinations thereof (Warren, 1996).

PWC Pearl is in the process of testing the use of composite/plastic piles and support materials on future fender and camel construction/replacement projects. The brand of material being considered for this experiment is the system developed by Seaward International Inc. Seaward International has developed the Seapile and Seatimber series for use as a replacement system for timber fender design and construction. This product is designed to be comparable in structural specifications to timber and is installed using the same method and equipment as timber piles. This system is attractive to PWC Pearl wharf builders because of its similarity to timber construction, longer estimated service life and recycling capabilities. The Seaward pile system is constructed using virtually the same hardware, tools equipment and methods as timber fender systems<sup>2,3,6,8</sup>. Table 3 shows the structural specifications for both timber and plastic piles.

| Pile Type          | Max. Allowable<br>Bending Stress | Berthing Load,<br>P (kips) | Deflection<br>Load (in.) | Energy (in-<br>kips) |
|--------------------|----------------------------------|----------------------------|--------------------------|----------------------|
| Plastic (13" dia.) | 2.4                              | 6.59                       | 10.52                    | 35.01                |
| Timber (14" dia)   | 3.77                             | 10.62                      | 4.92                     | 26.15                |

**Table 3. Structural Specifications - Plastic vs. Timber**

#### 4.2 Estimated Life Cycle.

The Seapile environmental life expectancy was estimated to be 25 - 50 years<sup>8</sup>. Timber piles wrapped with plastic have been used for a long time. Some of these wrapped piles have lasted for 25 years (Hoy, 1985). For the life cycle maintenance cost analysis herein, an estimated life expectancy for plastic piles will be assumed to lie between 10 and 25 years. These figures are conservative because of the lack of historic data concerning plastic piles (Hoy, 1996). These figures are also conservative operational life expectancies due to the fact that the 13" diameter Seapile has an energy absorption capacity of 35.01 in.-kips as compared to 26.15 in.-kips for a 14" diameter timber pile (Hoy, 1995).

## 5. Capital/Maintenance Cost Analysis

### 5.1 Material and Construction Costs.

The material costs shown in Table 4 were quoted from PWC Pearl Harbor<sup>3</sup> and Seaward International<sup>8</sup>. The total plastic fender material cost was \$4,985 compared to \$1,511 for timber. The plastic material costs are over three times that of timber.

| <b>Fender Material</b> | <b>cost each,<br/>timber</b> | <b>cost/l (lf),<br/>timber</b> | <b>cost each -<br/>Plastic<br/>(Seapile)</b> | <b>cost/l (lf),<br/>Plastic<br/>(Seapile)</b> |
|------------------------|------------------------------|--------------------------------|--|---|
| pile, 65'              | \$886.28                     | \$13.64                        | \$2,925.00                                   | \$45.00                                       |
| waler, 12"x12"x20'     | \$267.87                     | \$13.39                        | \$900.00                                     | \$45.00                                       |
| chock, 8"x12"x20'      | \$208.92                     | \$10.45                        | \$800.00                                     | \$40.00                                       |
| block, 4"x12"x20'      | \$147.96                     | \$7.40                         | \$360.00                                     | \$18.00                                       |
| <b>sub total</b>       | <b>\$1,511.03</b>            |                                | <b>\$4,985.00</b>                            |   |

**Table 4 - Quoted Fender Material Costs**

Fender construction (replacement) costs were estimated using information provided by PWC Pearl. The estimation was performed using the typical replacement project of demolishing and replacing 10 piles. The construction operation was broken down into the following 9 activities and associated costs of labor, equipment and disposal were applied. The various rates applied are the 1996 rates applied by PWC Pearl for specific work. These activities and costs are listed in Table 5 for both timber and the Seapile fender replacement estimation. These calculations can be seen in Appendix B.

| Activity # | Description                        | Timber Costs | Plastic Costs |
|------------|------------------------------------|--------------|---------------|
| 1          | Draw, Load, Transport Materials    | \$677        | \$677         |
| 2          | Stage Materials                    | \$472        | \$472         |
| 3          | Mobilization                       | \$885        | \$885         |
| 4          | Demolition                         | \$2,494      | \$2,494       |
| 5          | Construction                       | \$2,494      | \$2,494       |
| 6          | Load, Transport Debris             | \$676        | \$676         |
| 7          | Prep. Debris for Landfill          | \$882        | \$882         |
| 8          | Load, Transport Debris to Landfill | \$676        | \$676         |
| 9          | Dump Costs                         | \$928        | \$710         |
| Totals     | Total Material Costs               | \$10,668     | \$33,908      |
|            | Total Construction Costs           | \$7,698      | \$7,698       |
|            | Total Disposal Costs               | \$2,486      | \$2,268       |
|            | Total Costs For 10 Pile Job        | \$20,852     | 43,873        |
|            | Total Cost Per Pile                | \$2,085      | \$4,387       |

**Table 5 - Pile Replacement Activity Costs and Totals for a 10 Pile Job**

The mobilization, demolition, construction and disposal costs are assumed to be the same for both timber and the plastic system. This was assumed because the Seaward system employs basically the same construction method, tools, connections and equipment as timber<sup>6,8</sup>.

## 5.2 Economic Analysis Methodology.

The analysis is based on the scenario that a fender would be replaced today and periodically thereafter at the end of the pile life cycle for the remaining design life of the shore facility. The initial replacement costs are included in the analysis to provide a total cost comparison so that planners or engineers can identify the most cost effective repair option, based on the remaining design life of the facility. The analysis was conducted under the following assumptions and observations.

1. A typical fender system consists of: 1 - 13"x65' pile at 5' on center; 1 - 12"x12"x5' waler, 1-8"x12"x3.9' and 1-12"x12"x1' block/tie-in at 5' on center.
2. A typical repair job would replace 10 damaged fender piles and associated supporting members, including the wales, chocks, blocks and hardware. The limited material staging area, the facility outage duration, and the restricted equipment working area, due to the presence of fixed pier/wharf side equipment make it extremely difficult to undertake larger scale repair projects. The 10 pile job size represents a typical repair project size in Pearl Harbor by which PWC usually can set up and execute fender demolition and repair due to the constraints listed above<sup>6</sup>. Repair projects of less than 10 piles are usually grouped with other repair projects in the vicinity to minimize mobilization costs<sup>6</sup>. Larger projects are basically a series of these 10 pile jobs because equipment



has to be moved to the next location and the site area constraints along the waterfront preclude the staging of large amounts of materials<sup>6</sup>.

3. Costs such as drawing materials, transporting materials, staging materials, transporting debris, and hauling debris to the landfill are assumed to be the same for both timber and plastic fender projects<sup>6</sup>.
4. The savings resulting from recycling the plastic piles include the debris transportation and the landfill dumping costs. No other cost savings were assumed.
5. The life cycle is the period of time for which the fender system continues to provide the intended design energy absorption, since the energy absorption of the system is performed mainly by the piles (MILHBK 1025/1, 1994).
6. The expected life cycle of a timber pile is between 3 and 5 years. A 5 year expected life cycle, tends to be optimistic, because of the existence severely deteriorated piles which were installed 5 years prior, not loaded by vessels, and were subject only to environmental decay<sup>7</sup>.
7. The expected usable life of a plastic Seapile between 10 and 25 years was chosen in order to provide a "low end" for comparison. This is a conservative estimation compared to the manufacturers claim of 25 to 50 years. An expected life of 25 years, which is still conservative according to the manufacturer, was used because of claims made by the Port of Los Angeles officials who observed life cycles of 25 years for timber piles wrapped in plastic, which protected the timber piles from environmental decay (Hoy, 1995).

8. All replacement costs except timber are increasing at the rate of inflation. The cost of timber is inflating at a rate of 14.87 per year due to the lack of large trees available for the production of large timber piles (Williams, 1994).
9. The cost of plastic materials will increase with the rate of inflation even though cost should decline in the future due to advances in manufacturing and the establishment of the recycling industry<sup>8</sup>.
10. The average inflation rate for the next 50 years is 3.7 %. This figure was obtained by averaging the successive annual percent change in the Producer Price Index over the past 48 years (Census Bureau, 1975; Labor Dept., 1996; and Census Bureau, 1994). See Appendix C for calculations.

Two economic analyses were performed. The first analysis assumes the plastic fender debris will be disposed of in the landfill as for the timber debris. The second analysis assumes the plastic will be recycled and will not have to be disposed of in the landfill.

The analysis was conducted using the Excel spread sheets as shown in Appendix C. The cost of replacement for each fender type, plastic and timber were grouped together in the following manner. The cost of material (plastic or timber only) is denoted by (M). The other costs (labor, equipment, mobilization, disposal, etc.) are grouped together as one cost (C). The total of these costs, M + C, represent the cost of fender replacement today. The present worth of these future costs are then calculated using the following equation.

$$P = C + \frac{M(1+j)^n}{(1+i)^n}$$

Where i = average inflation rate and j = inflation rate of timber. For the calculation of P for plastic, i = j. These future costs are then accrued over each replacement life cycle

for each fender system which yields the total accumulated replacement (maintenance) cost per pile location.

### 5.3 Capital/Maintenance Cost Comparison.

Capital/Maintenance costs are plotted against projected remaining facility design life of 10, 20 , 30, 40 and 50 years in Figures 4 and 5. The first plot represents Case 1, which assumes that removed plastic material will be disposed of like that of timber (see Figure 4). The second plot, Case 2 (see Figure 5), assumes that the removed plastic will be recycled, so no disposal costs are incurred. The results show that for facilities with design lives of greater than 10, plastic is more economical. Ranges were used for expected pile life and projected design life values in order to provide flexibility in determining the "best choice" replacement fender system for a particular facility. This approach is similar to the design decision making process when considering design alternatives for a particular construction project.

Table 6 is a cost comparison matrix which summarizes the results of the aforementioned economic analysis. This table illustrates drastic differences in costs between timber and plastic systems, especially for longer remaining facility design lives.

In order to justify the use of plastic, it is reasonable to consider the point where the plastic system pays for itself in cost savings over timber. If it is assumed that the plastic pile system will last 25 years, the plastic system will pay for itself within 10 years if timber lasts 3 or 5 years. If it is assumed that the plastic system will last only 10 years and timber lasts 5 years, the plastic system will pay for itself in 20 years. This last scenario, assuming timber to last 5 years, does not seem to be realistic because of the observations of failures timber piles in Pearl Harbor<sup>1,6,7</sup>. Tables 7 and 8 show the cost savings of using plastic assuming a 25 year life cycle to that of timber assuming both 3 and 5 year life cycles.

| remaining<br>facility<br>design life<br>(yrs) | timber-<br>3 yr life<br>(\$) | timber-<br>5 yr life<br>(\$) | plastic-<br>no<br>recycle<br>10 yr life<br>(\$) | plastic-<br>no<br>recycle<br>25 yr life<br>(\$) | plastic-<br>recycle<br>10 yr life<br>(\$) | plastic-<br>recycle<br>25 yr life<br>(\$) |
|---|------------------------------|------------------------------|---|---|---|---|
| 10  | 11,060                       | 4,839                        | 4,387   | 4,387   | 4,161                                     | 4,161                                     |
| 20  | 28,681                       | 14,433                       | 8,775   | 4,387   | 8,322                                     | 4,161                                     |
| 30  | 68,010                       | 37,256                       | 13,162  | 8,775   | 12,483                                    | 8,322                                     |
| 40  | 217,008                      | 96,874                       | 17,549  | 8,775   | 16,644                                    | 8,322                                     |
| 50  | 529,433                      | 258,837                      | 21,937  | 8,775   | 20,805                                    | 8,322                                     |

**Table 6 - Timber vs. Plastic Fender Accumulated Replacement Cost Comparison**

| design<br>life (yrs) | accumulated cost savings per<br>pile location (no recycling) |           |  | accumulated cost savings<br>per pile location (recycling) |           |
|----------------------|--|-----------|--|---|-----------|
|                      | present worth<br>\$  | % savings |  | present worth<br>\$                                       | % savings |
| 10                   | 6,673  | 60.3%     |  | 6,899   | 62.4%     |
| 20                   | 24,293   | 84.7%     |  | 24,520  | 85.5%     |
| 30                   | 59,235   | 87.1%     |  | 59,688  | 87.8%     |
| 40                   | 208,233  | 96.0%     |  | 208,686   | 96.2%     |
| 50                   | 520,659  | 98.3%     |  | 521,112   | 98.4%     |

**Table 7 - Cost Comparison Results Plastic (25 yr. Life) vs. Timber (3 yr. Life)**

|                      | accumulated cost savings per pile<br>location (no recycling) |           |  | accumulated cost savings<br>per pile location (recycling) |           |
|----------------------|--|-----------|--|---|-----------|
| design<br>life (yrs) | present worth<br>\$  | % savings |  | present worth<br>\$                                       | % savings |
| 10                   | 451  | 9.3%      |  | 678   | 14.0%     |
| 20                   | 10,046   | 69.6%     |  | 10,273  | 71.2%     |
| 30                   | 28,481   | 76.4%     |  | 28,934  | 77.7%     |
| 40                   | 88,099   | 90.9%     |  | 88,552  | 91.4%     |
| 50                   | 250,062  | 96.6%     |  | 250,515   | 96.8%     |

**Table 8 - Cost Comparison Results Plastic (25 yr. Life) vs. Timber (5 yr. Life)**

## 6. Conclusions

The life cycle of the fender pile is the most important factor in determining the most cost effective material type for design and construction. The life cycle of a fender pile system is determined by the structural integrity of the piles. It is important to identify when the pile fails to support its design energy absorption capacity. This means that if the pile is damaged, it will not support its intended load and will fail under operational loading. Since failures from operational loading are of a random nature and no data exists to statistically model operational fender loading characteristics in Pearl Harbor, failures caused by operational loading were not considered in the life cycle estimation of the fender pile system.

It has been observed that timber piles in Pearl Harbor become damaged from environmental factors such as shrinkage and marine borer attack at a fairly rapid rate. Since it has been shown that environmental deterioration can accelerate operational loading failure, deterioration due to environmental factors governs the estimation of pile life cycle. Through interviews and site inspections, the life cycle of a timber pile was estimated at about 3 years. At this point, it can be expected that the pile will become weakened from environmental deterioration and, therefore, become too weak to support its intended loading capacity. A reasonable estimate for the life cycle of a plastic pile can be reached from observations of timber piles wrapped with plastic lasting up to 25 years.

The analysis was made using the lower and upper bounds of the estimated piles life cycles, which are 3 and 5 years for timber and 10 and 25 years for plastic piles. Potential recycling capability exists in Hawaii and was also considered in the analysis, although no reduction in plastic material costs were assumed. The accumulated

present worth replacement cost for both timber and plastic for assumed remaining shore facility design lives were estimated for each of the projected usable life cycles of plastic and timber piles. It is observed that timber is more costly for each remaining design life. For each of the projected remaining design lives, the accumulated plastic fender replacement costs are less than those of timber. The plastic fender system, although incurs a much greater initial cost, will pay for itself through savings in maintenance, within 10 years if a 3 year life cycle is assumed for timber.

## 7. Recommendations

This study was conducted based on data obtained from personal interviews, engineering reports, and field inspection results. In order to substantiate the findings of this report, a study using actual historical data is required. Because no historical data exists in a usable form for an economic analysis it is imperative that a mechanism for recording the necessary information be put in place. The following recommendations are made to set up the necessary database to perform an economic analysis from historical records.

1. The Naval Facilities Engineering Command (NAVFAC) should design a database from existing "off the shelf" software, such as Microsoft Access. This database should be the standard throughout NAVFAC. This data base should include fender information such as: frequency of use, type of vessels berthed, method of berthing, orientation of berth (N, S, E or W etc.), type of fender system used, date installed, the contractor, how much did the work cost (material, hardware, labor, equipment), and projected remaining usable life of the shore facility. NAVFAC should delegate the responsibility for implementing this program to the Engineering Field Division (EFD).
2. The EFD should assist the Staff Civil Engineers (SCE) in their division with implementation of this program at the local level. The SCE's should be responsible for maintaining the data base at their command.
3. Navy Public Works Centers should keep track of job costs by breaking down these costs into line items to be given to the SCE's for input in their databases.



4. The Port Operations Department at cognizant Naval Stations should submit information on each berthing area such as frequency of use, vessel type, weather conditions, type of berthing (tug assisted etc.). This information should then be provided to the SCE office for entry into the data base.

The database designed using an off the shelf program can be easily passed and used between commands and be easily updated to keep up with the latest computer technology.

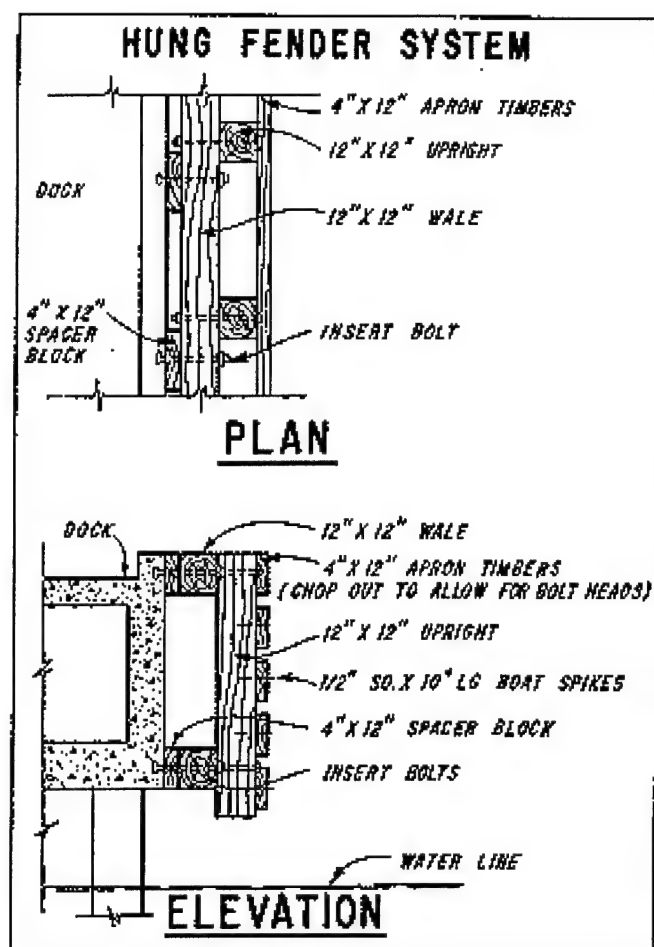
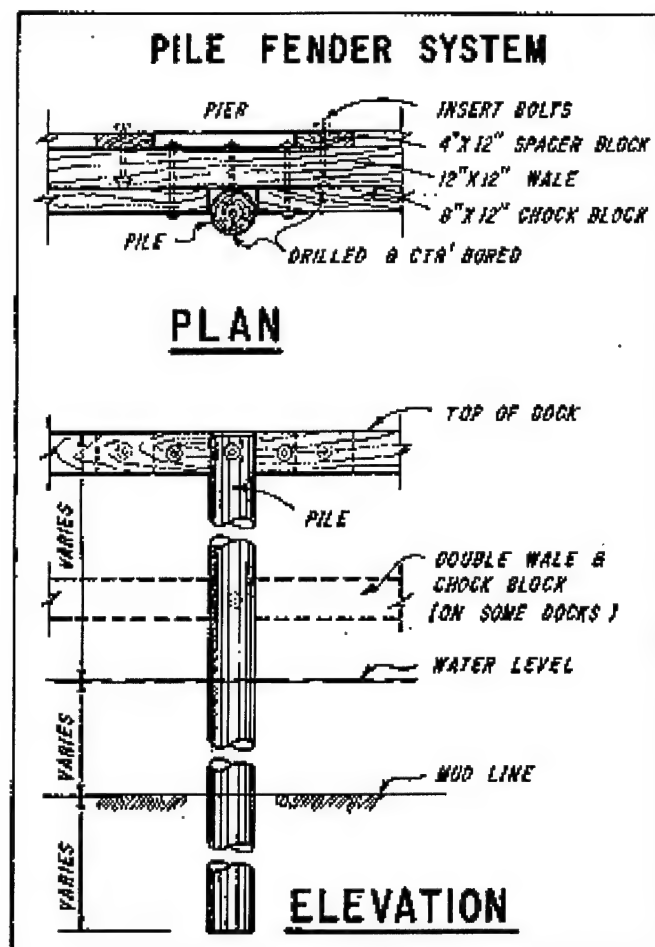


Figure 1. General Timber Fender System Designs



Figure 2. Typical Surface Vessel Timber Fender System - Pearl Harbor



Figure 3. Typical Submarine Timber Fender System - Pearl Harbor

present worth total accumulated capital/replacement cost per pile  
location vs. remaining facility design life  
(no recycling)

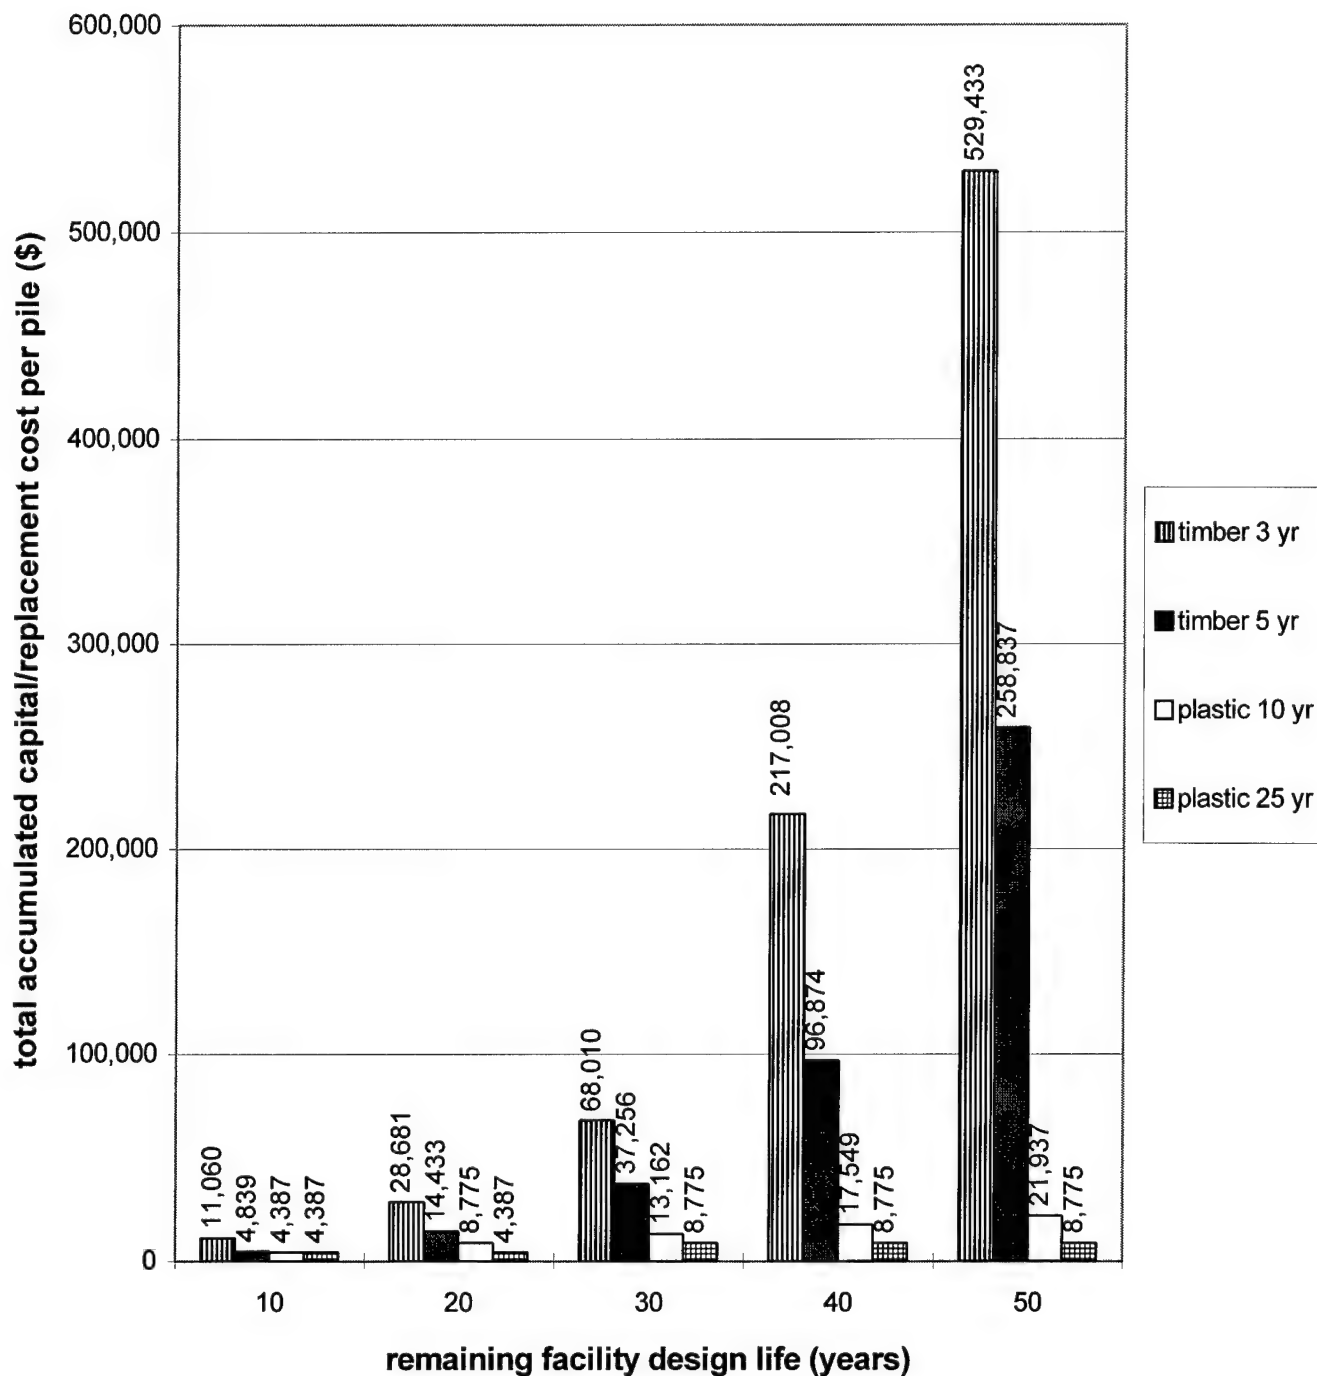


Figure 4. Total Costs (no Recycling) vs. Remaining Design Life

**present worth total accumulated capital/replacement cost per pile  
location vs. remaining facility design life  
(recycling)**

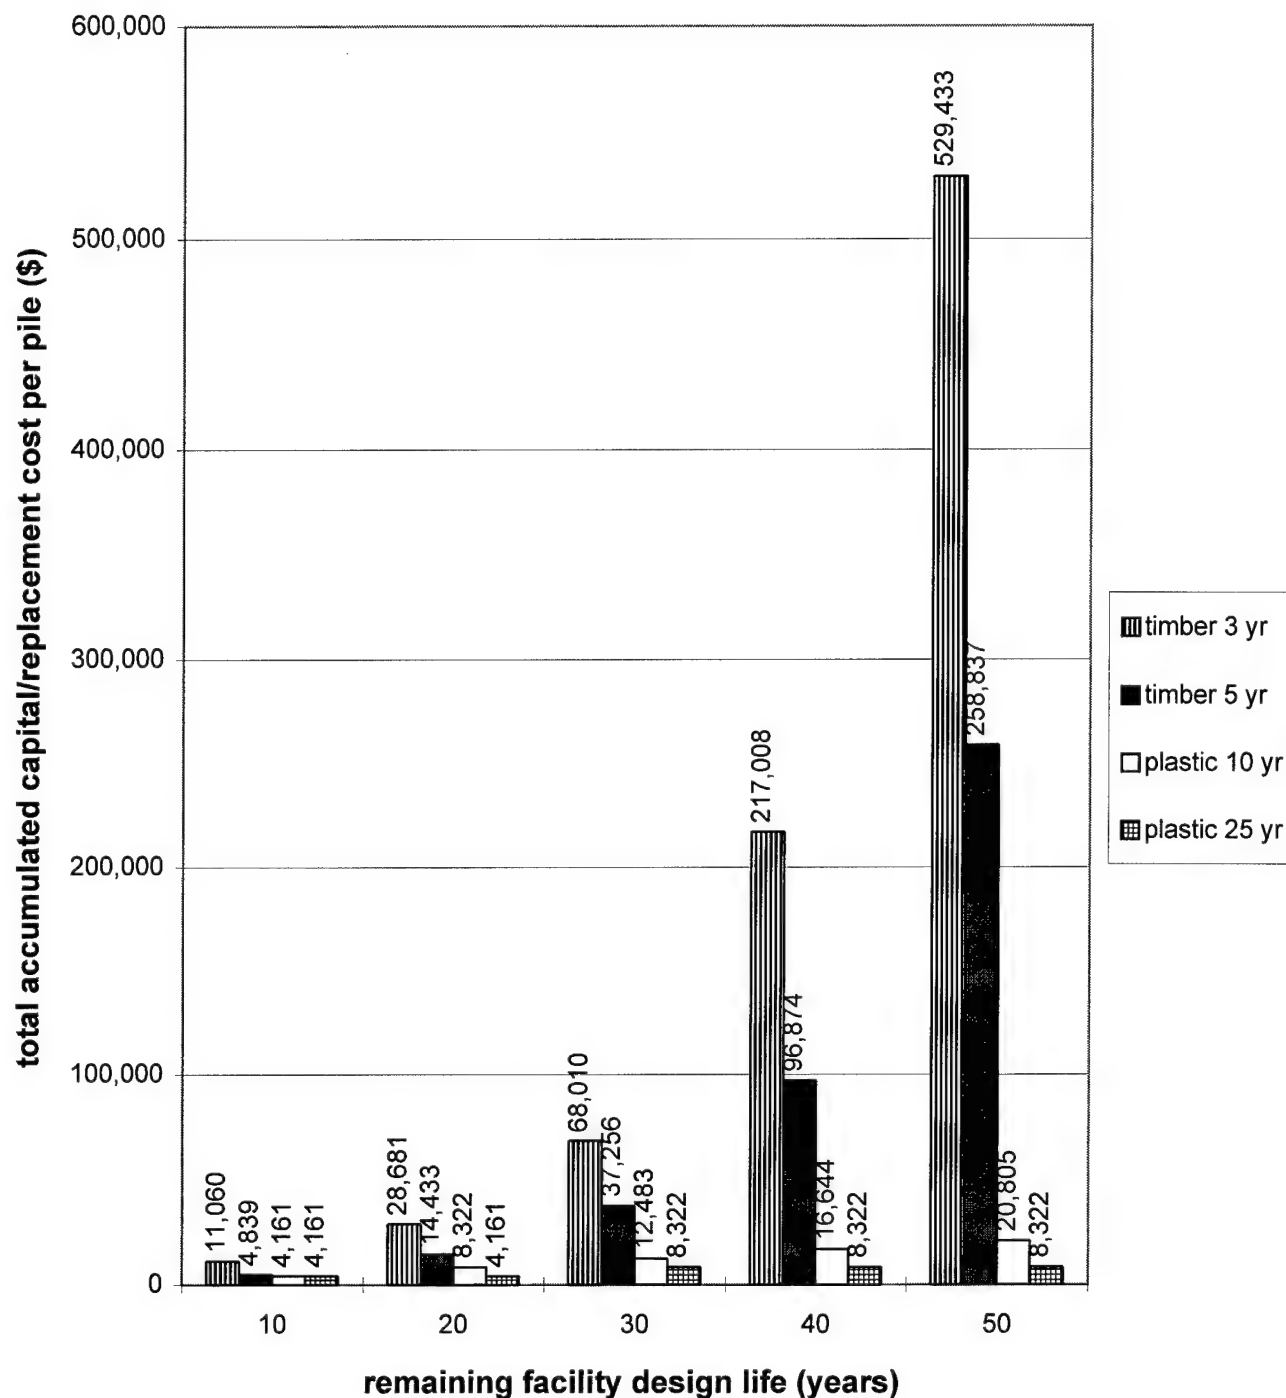


Figure 5. Total Costs (recycling) vs. Remaining Design Life

## References

- Audit Report (T30115), Operation and Maintenance of Piers and Wharfs, Naval Audit Service Capital Region, 7 October 1985
- Census Bureau, Historical Statistics of the United States, Colonial Times to 1970, Bicentennial Edition, Part 2, Washington, D. C., 1975
- Labor Dept., Producer Price Indexes Data for June 1996, U. S. Department of Labor Bureau of Labor Statistics, Washington, D. C., June 1996
- Census Bureau, Statistical Abstract of the United States: 1995 (115<sup>th</sup> edition.), U. S. Department of Labor Bureau of Labor Statistics, Washington, D. C., 1995
- CHESDIV 55-94(147), Chesapeake Division Naval Facilities Engineering Command Report No. 55-94(147) Underwater Facilities Inspections and Assessments - Naval Submarine Base Pearl Harbor.
- Ferver Engineering, Wharf Fender System Feasibility Study Naval Station Pearl Harbor, Ferver Engineering Company, San Diego, 31 March 1980.
- Hoy, David, Naval Civil Engineering Laboratory Technical Report TM-2158-SHR, Study on Recycled Plastic Fender Piles, Port Hueneme, California, November 1995.
- Matsuda, G., Alternate Material Systems For Pier Modification, Navy Public Works Center Pearl Harbor Engineering Study, 1996.
- MIL-HDBK-1025/1, Military Handbook - Piers and Wharfs, Department of Defense, 1994.
- NAVFAC MO-104.2, Specialized Waterfront Facilities Inspections, Department of Defense, July 1989.
- NAVFAC P-990, Conventional Underwater Construction and Repair Techniques, Naval Facilities Engineering Command.

PWCPEARLNOTE 7030, FY 1996 Rate Schedule, Navy Public Works Center Pearl Harbor, 14 Aug 1995.

Warren, George, Limited Flexural Tests of Plastic Composite Pile Configurations, Naval Civil Engineering Laboratory Technical Report SP-2005-SHR, Port Hueneme, California, August 1996.

Williams, David, Life Cycle Analysis of Fender System Alternatives, Board of Commissioners of the Port of New Orleans, 22 September 1994.

## List of Interviews

- 1 Ching, Frederick, Facilities Manager, Staff Civil Engineering Office, Naval Submarine Base Pearl Harbor, personal interview 9 October 1996
- 2 Emond, Alfred, Branch Manager Construction & Waterfront Trades, Navy Public Works Center, personal interview 20 September 1996
- 3 Ferrar, Ariel, Planner/Estimator, Navy Public Works Center Pearl Harbor, personal interview 30 October 1996.
- 4 Higgenbotham, QM1, Water Front Operations Coordinator, Naval Submarine Base, Pearl Harbor, personal interview and site visit 1 November 1996.
- 5 Kam, Donald, Facilities Manager, Staff Civil Engineering Office, Naval Station Pearl Harbor, personal interview 11 September 1996
- 6 Kekemu, Wayne, Branch Manager, Wharf Builders WC 521, Navy Public Works Center Pearl Harbor, personal interview 28 October 1996.
- 7 Kekemu, Wayne, Branch Manager, Wharf Builders WC 521, Navy Public Works Center Pearl Harbor, personal interview & site visit SUBASE S-9, 1 November 1996.
- 8 Taylor, Bob, Vice President, Seaward International Inc., Clearbrook, Va., telephone interview, 8 November 1996.



## Appendix A

### Field Survey Results and Existing Timber Fender Material Quantities

| Section             | inspection date       |                         | 9/21/96               | end STA =         | 1890                   | NAVSTA               | B-26 through B-22          | run totals               |
|---------------------|-----------------------|-------------------------|-----------------------|-------------------|------------------------|----------------------|----------------------------|--------------------------|
|                     | 1                     | beg STA=                |                       |                   |                        |                      |                            |                          |
| Timber Material     | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | breakdwn<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile         | 18                    | 6                       | 1                     | 1                 | 1010                   | 168                  | 275                        | 275                      |
| Fender Pile Cluster | 18                    | 60                      | 7                     | 7                 | 915                    | 107                  |                            |                          |
| Chock               | 8x12                  | 6                       | 4.5                   | 2                 | 1010                   | 1768                 | 10.5                       | 1768                     |
| Waler               | 12x12                 | 6                       | 6                     | 2                 | 1010                   | 2020                 | 12.0                       | 2020                     |
| Block               | 4x12x12               | 10                      | 1                     | 1                 | 1010                   | 101                  | 0.6                        | 101                      |
|                     |                       |                         |                       |                   |                        |                      |                            |                          |
| Section             | inspection date       |                         | 9/21/96               | end STA =         | 1575                   | NAVSTA               | B-26 through B-22          | run totals               |
|                     | 2                     | beg STA=                |                       |                   |                        |                      |                            |                          |
| Timber Material     | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | breakdwn<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile         | 18                    | 6                       | 1                     | 1                 | 315                    | 53                   | 89                         | 364                      |
| Fender Pile Cluster | 18                    | 60                      | 7                     | 7                 | 315                    | 37                   |                            |                          |
| Chock               | 8x12                  | 6                       | 4.5                   | 2                 | 315                    | 551                  | 10.5                       | 1890                     |
| Waler               | 12x12                 | 6                       | 6                     | 2                 | 315                    | 630                  | 12.0                       | 2125                     |
| Block               | 4x12x12               | 10                      | 1                     | 1                 | 315                    | 32                   | 0.6                        | 133                      |
|                     |                       |                         |                       |                   |                        |                      |                            |                          |
| Section             | inspection date       |                         | 9/21/96               | end STA =         | 0                      | NAVSTA               | B-26 through B-22          | run totals               |
|                     | 3                     | beg STA=                |                       |                   |                        |                      |                            |                          |
| Timber Material     | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | breakdwn<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile         | 18                    | 5                       | 1                     | 1                 | 1575                   | 315                  | 499                        | 863                      |
| Fender Pile Cluster | 18                    | 60                      | 7                     | 7                 | 1575                   | 184                  |                            |                          |
| Chock               | 8x12                  | 5                       | 3.5                   | 1                 | 1575                   | 1103                 | 3.5                        | 2205                     |
| Waler               | 12x12                 | 5                       | 5                     | 1                 | 1575                   | 1575                 | 5.0                        | 2440                     |
| Block               | 4x12x12               | 10                      | 1                     | 1                 | 1575                   | 158                  | 0.5                        | 290                      |

[illegible]

| Section         | inspection date       |   | 9/21/96               | end sta = 894     | NAVSTA                 |                      | M-1 through M-2            |                              |
|-----------------|-----------------------|---|-----------------------|-------------------|------------------------|----------------------|----------------------------|------------------------------|
|                 | 1                     | beg sta = 0   |                       |                   |                        |                      |                            |                              |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet)                               | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | breakdwn<br>(lf/fend pile) | total piles<br>(for section) |
|                 |                       |   |                       |                   |                        | count                |                            | run totals<br>(num & lf)     |
| Fender Pile     | 14                    | 3.5   | 1                     | 1                 | 894                    | 255                  |                            | 255                          |
| Chock           | 8x12                  | 3.5   | 2.3                   | 2                 | 894                    | 1490                 | 5.8                        | 1490                         |
| Waler           | 12x12                 | 3.5   | 3.5                   | 2                 | 894                    | 1788                 | 7.0                        | 1788                         |
| Block           | 4x12x12               | 10  | 1                     | 1                 | 894                    | 89                   | 0.4                        | 89                           |
| Section         | inspection date       |   | 9/21/96               | end sta = 1374    | NAVSTA                 |                      | M-3 through M-4            |                              |
|                 | 2                     | beg sta = 894   |                       |                   |                        |                      |                            |                              |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet)                               | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | breakdwn<br>(lf/fend pile) | total piles<br>(for section) |
|                 |                       |   |                       |                   |                        | count                |                            | run totals<br>(num & lf)     |
| Fender Pile     | 14                    | 3.5   | 1                     | 1                 | 480                    | 137                  |                            | 137                          |
| Chock           | 8x12                  | 3.5   | 2.3                   | 2                 | 480                    | 800                  | 5.8                        | 2290                         |
| Waler           | 12x12                 | 3.5   | 3.5                   | 2                 | 480                    | 960                  | 7.0                        | 2748                         |
| Block           | 4x12x12               | 10  | 1                     | 1                 | 480                    | 48                   | 0.4                        | 137                          |
| Section         | inspection date       |   | 9/21/96               | NAVSTA            | M-1 through M-4        |                      |                            |                              |
|                 | summary               | 0- 2234 feet  |                       |                   |                        |                      |                            |                              |
|                 |                       | amount of waterfront using timber fenders (lf) = 1374 |                       |                   |                        |                      |                            |                              |
| Timber Material | size/dia.<br>(inches) | totals<br>(num & lf)                                  |                       |                   |                        |                      |                            |                              |
| Fender Pile     | 18                    | 393   |                       |                   |                        |                      |                            |                              |
| Chock           | 8x12                  | 2290  |                       |                   |                        |                      |                            |                              |
| Waler           | 12x12                 | 2748  |                       |                   |                        |                      |                            |                              |
| Block           | 4x12x12               | 137   |                       |                   |                        |                      |                            |                              |

| Section         | inspection date       |   | 9/22/96               | end sta = 73      | SUBASE               | S-1A                       | run totals                   |
|-----------------|-----------------------|---|-----------------------|-------------------|----------------------|----------------------------|------------------------------|
|                 | 1                     | beg sta = 0   |                       |                   |                      |                            |                              |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet)                               | amt/length<br>on ctr. | number<br>on ctr. | totals<br>(num & lf) | breakdwn<br>(lf/fend pile) | total piles<br>(for section) |
| Fender Pile     | 14                    | 4.5   | 1                     | 1                 | 16                   |                            | 16                           |
| Chock           | 8x12                  | 4.5   | 3.3                   | 2                 | 127                  | 7.8                        | 127                          |
| Waler           | 12x12                 | 4.5   | 4.5                   | 2                 | 146                  | 9.0                        | 146                          |
| Block           | 4x12x12               | 5   | 1                     | 1                 | 15                   | 0.9                        | 15                           |
|                 |                       |   |                       |                   |                      |                            |                              |
| Section         | inspection date       |   | 9/22/96               | end sta = 1100    | SUBASE               | S-1A through S-1B          | run totals                   |
|                 | 2                     | beg sta = 73  |                       |                   |                      |                            |                              |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet)                               | amt/length<br>on ctr. | number<br>on ctr. | totals<br>(num & lf) | breakdwn<br>(lf/fend pile) | total piles<br>(for section) |
| Fender Pile     | 14                    | 5   | 1                     | 1                 | 205                  |                            | 189                          |
| Chock           | 8x12                  | 5   | 3.8                   | 2                 | 1814                 | 8.8                        | 1941                         |
| Waler           | 12x12                 | 5   | 5                     | 2                 | 2054                 | 10.0                       | 2200                         |
| Block           | 4x12x12               | 5   | 1                     | 1                 | 205                  | 1.0                        | 220                          |
|                 |                       |   |                       |                   |                      |                            |                              |
| Section         | inspection date       |   | 9/22/96               | SUBASE            | S-1A through S-1B    | run totals                 |                              |
|                 | summary               | 0- 1100 feet  |                       |                   |                      |                            |                              |
|                 |                       | amount of waterfront using timber fenders (lf) = 1100 |                       |                   |                      |                            |                              |
|                 |                       |   |                       |                   |                      |                            |                              |
|                 |                       |   |                       |                   |                      |                            |                              |
| Timber Material | size/dia.<br>(inches) | totals<br>(num & lf)                                  |                       |                   |                      |                            |                              |
| Fender Pile     | 18                    | 206   |                       |                   |                      |                            |                              |
| Chock           | 8x12                  | 1941  |                       |                   |                      |                            |                              |
| Waler           | 12x12                 | 2200  |                       |                   |                      |                            |                              |
| Block           | 4x12x12               | 220   |                       |                   |                      |                            |                              |

| Section         | inspection date |               | 9/22/96    |         | end sta = 285 |         | SUBASE       |            | S4    |       |                |               |
|-----------------|-----------------|---------------|------------|---------|---------------|---------|--------------|------------|-------|-------|----------------|---------------|
|                 | 1               | beg sta = 0   | amt/length | on ctr. | number        | on ctr. | totals       | (num & lf) | total | count | breakdwn       | total piles   |
| Timber Material | size/dia.       | dist. on ctr. | (feet)     | on ctr. | number        | on ctr. | totals       | (num & lf) | total | count | (lf/fend pile) | total piles   |
|                 | (inches)        |               |            |         |               |         |              |            |       |       |                | (for section) |
|                 |                 |               |            |         |               |         |              |            |       |       |                | run totals    |
|                 |                 |               |            |         |               |         |              |            |       |       |                | (num & lf)    |
| Fender Pile     | 14              | 3             | 1          | 1       | 1             | 1       | 285          | 95         | 101   | 101   |                | 101           |
| Chock           | 8x12            | 3             | 1.8        | 1       | 1             | 1       | 285          | 174        | 95    | 95    | 1.7            | 174           |
| Waler           | 12x12           | 3             | 3          | 1       | 1             | 1       | 285          | 285        | 95    | 95    | 3.0            | 285           |
| Block           | 4x12x12         | 8.5           | 1          | 1       | 1             | 1       | 285          | 34         | 34    | 34    | 0.3            | 34            |
| Section         | 2               | beg sta = 285 |            |         | end sta = 326 |         | SUBASE       |            |       |       | S-4            |               |
| Timber Material | size/dia.       | dist. on ctr. | amt/length |         | number        | on ctr. | Sect. length | total      | total | count | breakdwn       | total piles   |
|                 | (inches)        | (feet)        | on ctr.    |         |               |         | (feet)       | (num & lf) |       |       | (lf/fend pile) | (for section) |
|                 |                 |               |            |         |               |         |              |            |       |       |                | run totals    |
|                 |                 |               |            |         |               |         |              |            |       |       |                | (num & lf)    |
| Fender Pile     | 14              | 3             | 1          | 1       | 1             | 1       | 41           | 14         | 14    | 14    |                | 14            |
| Chock           | 8x12            | 3             | 1.8        | 1       | 1             | 1       | 41           | 25         | 14    | 14    | 1.8            | 199           |
| Waler           | 12x12           | 3             | 3          | 1       | 1             | 1       | 41           | 41         | 14    | 14    | 3.0            | 326           |
| Block           | 4x12x12         | 8.5           | 1          | 1       | 1             | 1       | 41           | 5          | 5     | 5     | 0.4            | 38            |
| Section         | 1               | beg sta = 326 |            |         | end sta = 440 |         | SUBASE       |            |       |       | S-5            |               |
| Timber Material | size/dia.       | dist. on ctr. | amt/length |         | number        | on ctr. | Sect. length | total      | total | count | breakdwn       | total piles   |
|                 | (inches)        | (feet)        | on ctr.    |         |               |         | (feet)       | (num & lf) |       |       | (lf/fend pile) | (for section) |
|                 |                 |               |            |         |               |         |              |            |       |       |                | run totals    |
|                 |                 |               |            |         |               |         |              |            |       |       |                | (num & lf)    |
| Fender Pile     | 14              | 3             | 1          | 1       | 1             | 1       | 114          | 38         | 38    | 38    |                | 38            |
| Chock           | 8x12            | 3             | 1.8        | 1       | 1             | 1       | 114          | 70         | 38    | 38    | 1.8            | 269           |
| Waler           | 12x12           | 3             | 3          | 1       | 1             | 1       | 114          | 114        | 38    | 38    | 3.0            | 440           |
| Block           | 4x12x12         | 10            | 1          | 1       | 1             | 1       | 114          | 11         | 11    | 11    | 0.3            | 50            |

| Section         | 2                     | beg sta = 440           |                       | end sta = 497     |                        | SUBASE               |                | S-5                        |                              |                          |  |
|-----------------|-----------------------|-------------------------|-----------------------|-------------------|------------------------|----------------------|----------------|----------------------------|------------------------------|--------------------------|--|
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile     | 14                    | 1.5                     | 1                     | 1                 | 57                     | 38                   | 38             |                            | 38                           | 191                      |  |
| Chock           | 8x12                  | 1.5                     | 0.3                   | 1                 | 57                     | 13                   | 38             | 0.3                        |                              | 282                      |  |
| Waler           | 12x12                 | 1.5                     | 1.5                   | 1                 | 57                     | 57                   | 38             | 1.5                        |                              | 497                      |  |
| Block           | 4x12x12               | 4                       | 1                     | 1                 | 57                     | 14                   | 14             | 0.4                        |                              | 64                       |  |
| Section         | 3                     | beg sta = 497           |                       | end sta = 668     |                        | SUBASE               |                | S-5                        |                              |                          |  |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile     | 14                    | 5.67                    | 1                     | 1                 | 171                    | 30                   | 30             |                            | 30                           | 221                      |  |
| Chock           | 8x12                  | 5.67                    | 4.5                   | 1                 | 171                    | 136                  | 30             | 4.5                        |                              | 417                      |  |
| Waler           | 12x12                 | 5.67                    | 5.67                  | 1                 | 121                    | 121                  | 21             | 4.0                        |                              | 618                      |  |
| Block           | 4x12x12               | 10                      | 1                     | 1                 | 121                    | 12                   | 12             | 0.4                        |                              | 76                       |  |
| Section         | summary               | 0 - 668                 |                       | feet              |                        | SUBASE               |                | S-4 through S-5            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |

| Section                 | inspection date    |                      | 9/22/96            |                      | end sta = 80        | S8                | SUBASE                  | total count (lf/fend pile) | total piles (for section) | run totals (num & lf) |
|-------------------------|--------------------|----------------------|--------------------|----------------------|---------------------|-------------------|-------------------------|----------------------------|---------------------------|-----------------------|
|                         | 1                  | beg sta = 0          | amt/length on ctr. | dist. on ctr. (feet) |                     |                   |                         |                            |                           |                       |
| Timber Material         | size/dia. (inches) | dist. on ctr. (feet) | amt/length on ctr. | number on ctr.       | Sect. length (feet) | totals (num & lf) | breakdwn (lf/fend pile) | total count (lf/fend pile) | total piles (for section) | run totals (num & lf) |
| Fender Pile             | 14                 | 6                    | 1                  | 1                    | 80                  | 13                |                         | 19                         | 19                        | 19                    |
| Chock                   | 8x12               | 6                    | 4.8                | 1                    | 80                  | 64                | 3.3                     | 13                         |                           | 64                    |
| Waler                   | 12x12              | 6                    | 6                  |                      | 80                  |                   |                         |                            |                           |                       |
| Block                   | 4x12x12            | 6                    | 1                  | 1                    | 80                  | 13                | 0.7                     | 13                         |                           | 13                    |
| inspection date 9/22/96 |                    |                      |                    |                      |                     |                   |                         |                            |                           |                       |
| Section                 | 2                  | beg sta = 80         | 9/22/96            |                      | end sta = 340       | SUBASE            |                         |                            |                           |                       |
| Timber Material         | size/dia. (inches) | dist. on ctr. (feet) | amt/length on ctr. | number on ctr.       | Sect. length (feet) | totals (num & lf) | breakdwn (lf/fend pile) | total count (lf/fend pile) | total piles (for section) | run totals (num & lf) |
| Fender Pile             | 14                 | 3.33                 | 1                  | 1                    | 260                 | 78                |                         | 78                         | 78                        | 97                    |
| Chock                   | 8x12               | 3.33                 | 2.2                | 1                    | 260                 | 169               | 2.2                     | 78                         |                           | 233                   |
| Waler                   | 12x12              | 3.33                 | 3.33               | 1                    | 260                 | 260               | 3.3                     | 78                         |                           | 260                   |
| Block                   | 4x12x12            | 8.75                 | 1                  | 1                    | 260                 | 30                | 0.4                     | 30                         |                           | 43                    |
| inspection date 9/22/96 |                    |                      |                    |                      |                     |                   |                         |                            |                           |                       |
| Section                 | 3                  | beg sta = 340        | 9/22/96            |                      | end sta = 381       | SUBASE            |                         |                            |                           |                       |
| Timber Material         | size/dia. (inches) | dist. on ctr. (feet) | amt/length on ctr. | number on ctr.       | Sect. length (feet) | totals (num & lf) | breakdwn (lf/fend pile) | total count (lf/fend pile) | total piles (for section) | run totals (num & lf) |
| Fender Pile             | 14                 | 3.33                 | 1                  | 1                    | 41                  | 12                |                         | 12                         | 12                        | 110                   |
| Chock                   | 8x12               | 3.33                 | 2.2                | 1                    | 41                  | 27                | 2.2                     | 12                         |                           | 260                   |
| Waler                   | 12x12              | 3.33                 | 3.33               | 1                    | 41                  | 41                | 3.3                     | 12                         |                           | 301                   |
| Block                   | 4x12x12            | 8.75                 | 1                  | 1                    | 41                  | 5                 | 0.4                     | 5                          |                           | 48                    |



| Section         | inspection date       |                         | 9/22/96    |         | end sta = 419 | SUBASE                 | S-9                 | run totals               |
|-----------------|-----------------------|-------------------------|------------|---------|---------------|------------------------|---------------------|--------------------------|
|                 | 1                     | beg sta = 381           | amt/length | on ctr. |               |                        |                     |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length | on ctr. | number        | Sect. length<br>(feet) | total<br>(num & lf) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1          | 1       | 1             | 38                     | 8                   | 117                      |
| Chock           | 8x12                  | 5                       | 3.8        | 1       | 1             | 38                     | 29                  | 289                      |
| Waler           | 12x12                 | 5                       | 5          | 1       | 1             | 38                     | 38                  | 339                      |
| Block           | 4x12x12               | 9                       | 1          | 1       | 1             | 38                     | 4                   | 52                       |
|                 |                       |                         |            |         |               |                        |                     |                          |
| Section         | inspection date       |                         | 9/22/96    |         | end sta = 506 | SUBASE                 | S-9                 | run totals               |
|                 | 2                     | beg sta = 419           | amt/length | on ctr. |               |                        |                     |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length | on ctr. | number        | Sect. length<br>(feet) | total<br>(num & lf) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 2                       | 1          | 1       | 1             | 87                     | 44                  | 161                      |
| Chock           | 8x12                  | 2                       | 0.8        | 1       | 1             | 87                     | 36                  | 325                      |
| Waler           | 12x12                 | 2                       | 2          | 1       | 1             | 87                     | 87                  | 426                      |
| Block           | 4x12x12               | 9                       | 1          | 1       | 1             | 87                     | 10                  | 62                       |
|                 |                       |                         |            |         |               |                        |                     |                          |
| Section         | inspection date       |                         | 9/22/96    |         | end sta = 555 | SUBASE                 | S-9                 | run totals               |
|                 | 3                     | beg sta = 506           | amt/length | on ctr. |               |                        |                     |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length | on ctr. | number        | Sect. length<br>(feet) | total<br>(num & lf) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 6                       | 1          | 1       | 1             | 49                     | 8                   | 169                      |
| Chock           | 8x12                  | 6                       | 4.8        | 1       | 1             | 49                     | 39                  | 365                      |
| Waler           | 12x12                 | 6                       | 6          | 1       | 1             | 49                     | 49                  | 475                      |
| Block           | 4x12x12               | 9                       | 1          | 1       | 1             | 49                     | 5                   | 67                       |

**Sierra 8-9**

| Section         | inspection date       |  | 9/22/96               |                   | end sta =              | 646                  | SUBASE         |                           |                              |                          |
|-----------------|-----------------------|--|-----------------------|-------------------|------------------------|----------------------|----------------|---------------------------|------------------------------|--------------------------|
|                 | 4                     | beg sta =  | 555                   |                   |                        |                      |                |                           |                              |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet)                          | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/end pile) | total piles<br>(for section) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 6  | 1                     | 1                 | 91                     | 15                   | 15             |                           | 15                           | 184                      |
| Chock           | 8x12                  | 6  | 4.8                   | 1                 | 91                     | 73                   | 15             | 4.8                       |                              | 438                      |
| Waler           | 12x12                 | 6  | 6                     | 1                 | 91                     | 91                   | 15             | 6.0                       |                              | 566                      |
| Block           | 4x12x12               | 9  | 1                     | 1                 | 91                     | 10                   | 10             | 0.7                       |                              | 77                       |
|                 |                       |  |                       |                   |                        |                      |                |                           |                              |                          |
|                 | inspection date       | 9/22/96  |                       |                   |                        |                      |                |                           |                              |                          |
| Section         | 5                     | beg sta =  | 646                   | end sta =         | 763                    | SUBASE               |                | S-9                       |                              |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet)                          | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/end pile) | total piles<br>(for section) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 6  | 1                     | 1                 | 117                    | 20                   | 20             |                           | 20                           | 204                      |
| Chock           | 8x12                  | 6  | 4.8                   | 1                 | 117                    | 94                   | 20             | 4.8                       |                              | 532                      |
| Waler           | 12x12                 | 6  | 6                     | 1                 | 117                    | 117                  | 20             | 6.0                       |                              | 683                      |
| Block           | 4x12x12               | 9  | 1                     | 1                 | 117                    | 13                   | 13             | 0.7                       |                              | 90                       |
|                 |                       |  |                       |                   |                        |                      |                |                           |                              |                          |
|                 | inspection date       | 9/22/96  |                       |                   |                        |                      |                |                           |                              |                          |
| Section         | summary               | 0 -  | 506                   | feet              | SUBASE                 | S-4 through S-5      |                |                           |                              |                          |
|                 |                       | amount of waterfront using timber fenders (lf) = |                       | 763               |                        |                      |                |                           |                              |                          |
|                 |                       |  |                       |                   |                        |                      |                |                           |                              |                          |
| Timber Material | size/dia.<br>(inches) | totals<br>(num & lf)                             |                       |                   |                        |                      |                |                           |                              |                          |
| Fender Pile     | 18                    | 204  |                       |                   |                        |                      |                |                           |                              |                          |
| Chock           | 8x12                  | 532  |                       |                   |                        |                      |                |                           |                              |                          |
| Waler           | 12x12                 | 683  |                       |                   |                        |                      |                |                           |                              |                          |
| Block           | 4x12x12               | 90   |                       |                   |                        |                      |                |                           |                              |                          |

| Section         | inspection date       |                         | 9/22/96               | end sta = 65      | SUBASE                 | S-10 through S-14                      | run totals               |
|-----------------|-----------------------|-------------------------|-----------------------|-------------------|------------------------|--|--------------------------|
|                 | 1                     | beg sta = 0             |                       |                   |                        |  |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | breakdwn total piles<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 6                       | 1                     | 1                 | 65                     | 17                                     | 17                       |
| Chock           | 8x12                  | 6                       | 4.8                   | 1                 | 65                     | 3.1                                    | 52                       |
| Waler           | 12x12                 | 6                       | 6                     |                   | 65                     |  |                          |
| Block           | 4x12x12               | 9                       | 1                     | 1                 | 65                     | 0.4                                    | 7                        |
| Section         | inspection date       |                         | 9/22/96               | end sta = 145     | SUBASE                 | S-10 through S-14                      | run totals               |
|                 | 2                     | beg sta = 65            |                       |                   |                        |  |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | breakdwn total piles<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 2                       | 1                     | 1                 | 80                     | 40                                     | 57                       |
| Chock           | 8x12                  | 2                       | 0.8                   | 2                 | 80                     | 2.8                                    | 166                      |
| Waler           | 12x12                 | 2                       | 2                     | 2                 | 80                     | 4.0                                    | 160                      |
| Block           | 4x12x12               | 9                       | 1                     | 2                 | 80                     | 0.4                                    | 25                       |
| Section         | inspection date       |                         | 9/22/96               | end sta = 253     | SUBASE                 | S-10 through S-14                      | run totals               |
|                 | 3                     | beg sta = 145           |                       |                   |                        |  |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | breakdwn total piles<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 2                       | 1                     | 1                 | 108                    | 54                                     | 111                      |
| Chock           | 8x12                  | 2                       | 0.8                   | 2                 | 108                    | 2.8                                    | 319                      |
| Waler           | 12x12                 | 2                       | 2                     | 2                 | 108                    | 4.0                                    | 376                      |
| Block           | 4x12x12               | 9                       | 1                     | 2                 | 108                    | 0.4                                    | 49                       |

| Section         | 4                     | beg sta = 253           | end sta = 593         | SUBASE            | S-10 through S-14      |                      |                |                            |                              |                          |
|-----------------|-----------------------|-------------------------|-----------------------|-------------------|------------------------|----------------------|----------------|----------------------------|------------------------------|--------------------------|
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 3                       | 1                     | 1                 | 340                    | 113                  | 113            |                            | 113                          | 224                      |
| Chock           | 8x12                  | 3                       | 1.8                   | 1                 | 340                    | 208                  | 113            | 1.8                        |                              | 526                      |
| Waler           | 12x4                  | 3                       | 3                     | 1                 | 340                    | 340                  | 113            | 3.0                        |                              | 716                      |
| Block           | 4x12x12               | 9                       | 1                     | 1                 | 340                    | 38                   | 38             | 0.3                        |                              | 87                       |
| Section         | 5                     | beg sta = 593           | end sta = 621         | SUBASE            | S-10 through S-14      |                      |                |                            |                              |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 7.75                    | 1                     | 1                 | 28                     | 4                    | 4              |                            | 4                            | 228                      |
| Chock           | 8x12                  | 7.75                    | 6.6                   | 1                 | 28                     | 24                   | 4              | 6.6                        |                              | 526                      |
| Waler           | 12x12                 | 7.75                    | 7.75                  | 1                 | 28                     | 28                   | 4              | 7.8                        |                              | 716                      |
| Block           | 4x12x12               | 7.75                    | 1                     | 1                 | 28                     | 4                    | 4              | 1.0                        |                              | 87                       |
| Section         | 6                     | beg sta = 621           | end sta = 704         | SUBASE            | S-10 through S-14      |                      |                |                            |                              |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 4                       | 1                     | 1                 | 83                     | 21                   | 21             |                            | 21                           | 249                      |
| Chock           | 8x12                  | 4                       | 2.8                   | 1                 | 83                     | 59                   | 21             | 2.8                        |                              | 585                      |
| Waler           | 12x12                 | 4                       | 4                     | 1                 | 83                     | 83                   | 21             | 4.0                        |                              | 799                      |
| Block           | 4x12x12               | 9                       | 1                     | 1                 | 83                     | 9                    | 9              | 0.4                        |                              | 96                       |

| Section         | 7                     | beg sta = 704           |                       | end sta = 789     |                        | SUBASE               | S-10 through S-14 |                            |                              |                          |
|-----------------|-----------------------|-------------------------|-----------------------|-------------------|------------------------|----------------------|-------------------|----------------------------|------------------------------|--------------------------|
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count    | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 6                       | 1                     | 1                 | 85                     | 14                   | 14                |                            | 14                           | 263                      |
| Chock           | 8x12                  | 6                       | 4.8                   | 1                 | 85                     | 68                   | 14                | 4.8                        |                              | 654                      |
| Waler           | 12x12                 | 6                       | 6                     | 1                 | 85                     | 85                   | 14                | 6.0                        |                              | 884                      |
| Block           | 4x12x12               | 9                       | 1                     | 1                 | 85                     | 9                    | 9                 | 0.7                        |                              | 105                      |
| Section         | 8                     | beg sta = 789           |                       | end sta = 871     |                        | SUBASE               | S-10 through S-14 |                            |                              |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count    | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 82                     | 16                   | 16                |                            | 16                           | 279                      |
| Chock           | 8x12                  | 5                       | 3.8                   | 1                 | 82                     | 63                   | 16                | 3.8                        |                              | 717                      |
| Waler           | 12x12                 | 5                       | 5                     | 1                 | 82                     | 82                   | 16                | 5.0                        |                              | 966                      |
| Block           | 4x12x12               | 6                       | 1                     | 1                 | 82                     | 14                   | 14                | 0.8                        |                              | 119                      |
| Section         | 9                     | beg sta = 871           |                       | end sta = 924     |                        | SUBASE               | S-10 through S-14 |                            |                              |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count    | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 2                       | 1                     | 1                 | 53                     | 27                   | 27                |                            | 27                           | 306                      |
| Chock           | 8x12                  | 2                       | 0.8                   | 1                 | 53                     | 22                   | 27                | 0.8                        |                              | 739                      |
| Waler           | 12x12                 | 2                       | 2                     | 1                 | 53                     | 53                   | 27                | 2.0                        |                              | 1019                     |
| Block           | 4x12x12               | 6                       | 1                     | 1                 | 53                     | 9                    | 9                 | 0.3                        |                              | 128                      |

| Section         | 10                    | beg sta = 924           |                       | end sta = 987     |                        | SUBASE               |                | S-10 through S-14          |                              |                          |  |
|-----------------|-----------------------|-------------------------|-----------------------|-------------------|------------------------|----------------------|----------------|----------------------------|------------------------------|--------------------------|--|
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 63                     | 13                   | 13             |                            | 13                           | 318                      |  |
| Chock           | 8x12                  | 5                       | 3.8                   | 1                 | 63                     | 48                   | 13             | 3.8                        |                              | 787                      |  |
| Waler           | 12x12                 | 5                       | 5                     | 1                 | 63                     | 63                   | 13             | 5.0                        |                              | 1082                     |  |
| Block           | 4x12x12               | 6                       | 1                     | 1                 | 63                     | 11                   | 11             | 0.8                        |                              | 138                      |  |
| Section         | 11                    | beg sta = 987           |                       | end sta = 1095    |                        | SUBASE               |                | S-10 through S-14          |                              |                          |  |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile     | 14                    | 3.5                     | 1                     | 1                 | 108                    | 31                   | 31             |                            | 31                           | 349                      |  |
| Chock           | 8x12                  | 3.5                     | 2.3                   | 1                 | 108                    | 72                   | 31             | 2.3                        |                              | 859                      |  |
| Waler           | 12x12                 | 3.5                     | 3.5                   | 1                 | 108                    | 108                  | 31             | 3.5                        |                              | 1190                     |  |
| Block           | 4x12x12               | 6                       | 1                     | 1                 | 108                    | 18                   | 18             | 0.6                        |                              | 156                      |  |
| Section         | 12                    | beg sta = 1095          |                       | end sta = 1142    |                        | SUBASE               |                | S-10 through S-14          |                              |                          |  |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile     | 14                    | 2                       | 1                     | 1                 | 47                     | 24                   | 24             |                            | 24                           | 373                      |  |
| Chock           | 8x12                  | 2                       | 0.8                   | 1                 | 47                     | 20                   | 24             | 0.8                        |                              | 879                      |  |
| Waler           | 12x12                 | 2                       | 2                     | 2                 | 47                     | 94                   | 47             | 4.0                        |                              | 1284                     |  |
| Block           | 4x12x12               | 6                       | 1                     | 2                 | 47                     | 16                   | 16             | 0.7                        |                              | 172                      |  |

| Section         | 13                    | beg sta = 1142  | end sta = 1219        | SUBASE            | S-10 through S-14      |                          |
|-----------------|-----------------------|---|-----------------------|-------------------|------------------------|--------------------------|
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet)                               | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5   | 1                     | 1                 | 77                     | 388                      |
| Chock           | 8x12                  | 5   | 3.8                   | 1                 | 77                     | 938                      |
| Waler           | 12x4                  | 5   | 5                     | 2                 | 77                     | 1438                     |
| Block           | 4x12x12               | 5   | 1                     | 2                 | 77                     | 203                      |
| Section         | 14                    | beg sta = 1219  | end sta = 1277        | SUBASE            | S-10 through S-14      |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet)                               | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5   | 1                     | 1                 | 58                     | 400                      |
| Chock           | 8x12                  | 5   | 3.8                   | 1                 | 58                     | 982                      |
| Waler           | 12x12                 | 5   | 5                     | 2                 | 58                     | 1554                     |
| Block           | 4x12x12               | 5   | 1                     | 2                 | 58                     | 226                      |
| Section         | summary               | 0 - 1277  | feet                  | SUBASE S-10 t     | S-10 through S-14      |                          |
|                 |                       | amount of waterfront using timber fenders (lf) = 1277 |                       |                   |                        |                          |
| Timber Material | size/dia.<br>(inches) | totals<br>(num & lf)                                  |                       |                   |                        |                          |
| Fender Pile     | 18                    | 400   |                       |                   |                        |                          |
| Chock           | 8x12                  | 982   |                       |                   |                        |                          |
| Waler           | 12x12                 | 1060  |                       |                   |                        |                          |
| Waler           | 12X4                  | 494   |                       |                   |                        |                          |
| Block           | 4x12x12               | 226   |                       |                   |                        |                          |

| Section         | 13                    | beg sta =   | 1142                  | end sta =                       | 1219                   | SUBASE               |                | S-10 through S-14          |                              |                          |
|-----------------|-----------------------|---|-----------------------|---------------------------------|------------------------|----------------------|----------------|----------------------------|------------------------------|--------------------------|
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet)                               | amt/length<br>on ctr. | number<br>on ctr.               | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5   | 1                     | 1                               | 77                     | 15                   | 15             |                            | 15                           | 388                      |
| Chock           | 8x12                  | 5   | 3.8                   | 1                               | 77                     | 59                   | 15             | 3.8                        |                              | 938                      |
| Waler           | 12x4                  | 5   | 5                     | 2                               | 77                     | 154                  | 31             | 10.0                       |                              | 1438                     |
| Block           | 4x12x12               | 5   | 1                     | 2                               | 77                     | 31                   | 31             | 2.0                        |                              | 203                      |
| Section         | 14                    | beg sta =   | 1219                  | end sta =                       | 1277                   | SUBASE               |                | S-10 through S-14          |                              |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet)                               | amt/length<br>on ctr. | number<br>on ctr.               | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5   | 1                     | 1                               | 58                     | 12                   | 12             |                            | 12                           | 400                      |
| Chock           | 8x12                  | 5   | 3.8                   | 1                               | 58                     | 44                   | 12             | 3.8                        |                              | 982                      |
| Waler           | 12x12                 | 5   | 5                     | 2                               | 58                     | 116                  | 23             | 10.0                       |                              | 1554                     |
| Block           | 4x12x12               | 5   | 1                     | 2                               | 58                     | 23                   | 23             | 2.0                        |                              | 226                      |
| Section         | summary               | 0 - 1277  | feet                  | SUBASE S-10 t S-10 through S-14 |                        |                      |                |                            |                              |                          |
|                 |                       | amount of waterfront using timber fenders (lf) = 1277 |                       |                                 |                        |                      |                |                            |                              |                          |
|                 |                       |   |                       |                                 |                        |                      |                |                            |                              |                          |
| Timber Material | size/dia.<br>(inches) | totals<br>(num & lf)                                  |                       |                                 |                        |                      |                |                            |                              |                          |
| Fender Pile     | 18                    | 400   |                       |                                 |                        |                      |                |                            |                              |                          |
| Chock           | 8x12                  | 982   |                       |                                 |                        |                      |                |                            |                              |                          |
| Waler           | 12x12                 | 1060  |                       |                                 |                        |                      |                |                            |                              |                          |
| Waler           | 12X4                  | 494   |                       |                                 |                        |                      |                |                            |                              |                          |
| Block           | 4x12x12               | 226   |                       |                                 |                        |                      |                |                            |                              |                          |



| Section         | inspection date       |                         | 9/27/96               | end sta = 166  |         | NAVSTA              | S-15                       | run totals               |
|-----------------|-----------------------|-------------------------|-----------------------|----------------|---------|---------------------|----------------------------|--------------------------|
|                 | 1                     | beg sta = 0             |                       | number         | on ctr. |                     |                            |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number         | on ctr. | total<br>(num & lf) | breakdwn<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1              |         | 33                  | 39                         | 39                       |
| Chock           | 8x12                  | 5                       | 3.8                   | 1              |         | 127                 | 3.2                        | 127                      |
| Waler           | 12x12                 | 5                       | 5                     | 1              |         | 166                 | 5.0                        | 166                      |
| Block           | 4x12x12               | 5                       | 1                     | 1              |         | 33                  | 0.8                        | 33                       |
|                 |                       |                         |                       |                |         |                     |                            |                          |
| Section         | inspection date       |                         | 9/27/96               | end sta = 1082 |         | NAVSTA              | S-16                       | run totals               |
|                 | 1                     | beg sta = 624           |                       | number         | on ctr. |                     |                            |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number         | on ctr. | total<br>(num & lf) | breakdwn<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1              |         | 92                  | 92                         | 131                      |
| Chock           | 8x12                  | 5                       | 3.8                   | 2              |         | 809                 | 8.8                        | 936                      |
| Waler           | 12x12                 | 5                       | 5                     | 2              |         | 916                 | 10.0                       | 1082                     |
| Block           | 4x12x12               | 5                       | 1                     | 2              |         | 183                 | 2.0                        | 216                      |
|                 |                       |                         |                       |                |         |                     |                            |                          |
| Section         | inspection date       |                         | 9/27/96               | end sta = 1248 |         | NAVSTA              | S-16                       | run totals               |
|                 | 2                     | beg sta = 1082          |                       | number         | on ctr. |                     |                            |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number         | on ctr. | total<br>(num & lf) | breakdwn<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1              |         | 33                  | 33                         | 164                      |
| Chock           | 8x12                  | 5                       | 3.8                   | 1              |         | 127                 | 3.8                        | 1064                     |
| Waler           | 12x4                  | 5                       | 5                     | 1              |         | 166                 | 5.0                        | 1248                     |
| Block           | 4x12x12               | 9                       | 1                     | 1              |         | 18                  | 0.6                        | 235                      |

| Section         | inspection date       |                         | 9/27/96 |                       | end sta =         | 1704                   | NAVSTA              |                | S-17                       | run totals<br>(num & lf)     |
|-----------------|-----------------------|-------------------------|---------|-----------------------|-------------------|------------------------|---------------------|----------------|----------------------------|------------------------------|
|                 | 17                    | beg sta =               | 1248    | amt/length<br>on ctr. |                   |                        | total<br>(num & lf) | total<br>count |                            |                              |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) |         |                       | number<br>on ctr. | Sect. length<br>(feet) |                     |                | breakdwn<br>(lf/fend pile) | total piles<br>(for section) |
| Fender Pile     | 14                    | 5                       | 1       |                       | 1                 | 456                    | 91                  | 91             |                            | 91                           |
| Chock           | 8x12                  | 5                       | 3.8     |                       | 1                 | 456                    | 350                 | 91             | 3.8                        | 1413                         |
| Waler           | 12x12                 | 5                       | 5       |                       | 1                 | 456                    | 456                 | 91             | 5.0                        | 1704                         |
| Block           | 4x12x12               | 5                       | 1       |                       | 1                 | 456                    | 91                  | 91             | 1.0                        | 326                          |
|                 |                       |                         |         |                       |                   |                        |                     |                |                            |                              |
| Section         | inspection date       |                         | 9/27/96 |                       | end sta =         | 2160                   | NAVSTA              |                | S-18                       | run totals<br>(num & lf)     |
|                 | 1                     | beg sta =               | 1704    |                       |                   |                        |                     |                |                            |                              |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) |         |                       | number<br>on ctr. | Sect. length<br>(feet) |                     |                | breakdwn<br>(lf/fend pile) | total piles<br>(for section) |
| Fender Pile     | 14                    | 5                       | 1       |                       | 1                 | 456                    | 91                  | 91             |                            | 91                           |
| Chock           | 8x12                  | 5                       | 3.8     |                       | 1                 | 456                    | 350                 | 91             | 3.8                        | 1763                         |
| Waler           | 12x12                 | 5                       | 5       |                       | 1                 | 456                    | 456                 | 91             | 5.0                        | 2160                         |
| Block           | 4x12x12               | 5                       | 1       |                       | 1                 | 456                    | 91                  | 91             | 1.0                        | 417                          |
|                 |                       |                         |         |                       |                   |                        |                     |                |                            |                              |
| Section         | inspection date       |                         | 9/27/96 |                       | end sta =         | 2326                   | NAVSTA              |                | S-18                       | run totals<br>(num & lf)     |
|                 | 2                     | beg sta =               | 2160    |                       |                   |                        |                     |                |                            |                              |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) |         |                       | number<br>on ctr. | Sect. length<br>(feet) |                     |                | breakdwn<br>(lf/fend pile) | total piles<br>(for section) |
| Fender Pile     | 14                    | 5                       | 1       |                       | 1                 | 166                    | 33                  | 33             |                            | 33                           |
| Chock           | 8x12                  | 5                       | 3.8     |                       | 1                 | 166                    | 127                 | 33             | 3.8                        | 1890                         |
| Waler           | 12x12                 | 5                       | 5       |                       | 1                 | 166                    | 166                 | 33             | 5.0                        | 2326                         |
| Block           | 4x12x12               | 5                       | 1       |                       | 1                 | 166                    | 33                  | 33             | 1.0                        | 450                          |

| Section         | inspection date       |                         | 9/27/96               | end sta = 2326    | end sta = 2906         | NAVSTA               | S-19 through S-21 |                            | run totals<br>(num & lf) |
|-----------------|-----------------------|-------------------------|-----------------------|-------------------|------------------------|----------------------|-------------------|----------------------------|--------------------------|
|                 | 1                     | beg sta =               |                       |                   |                        |                      | total<br>count    | breakdwn<br>(lf/fend pile) |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count    | breakdwn<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 580                    | 116                  | 116               | 122                        | 502                      |
| Chock           | 8x12                  | 5                       | 3.8                   | 1                 | 580                    | 445                  | 116               | 3.8                        | 2335                     |
| Waler           | 12x12                 | 5                       | 5                     | 1                 | 580                    | 580                  | 116               | 5.0                        | 2906                     |
| Block           | 4x12x12               | 5                       | 1                     | 1                 | 580                    | 116                  | 116               | 1.0                        | 566                      |
| Section         | inspection date       |                         | 9/27/96               | end sta = 2906    | end sta = 3111         | NAVSTA               | S-19 through S-21 |                            | run totals<br>(num & lf) |
|                 | 2                     | beg sta =               |                       |                   |                        |                      | total<br>count    | breakdwn<br>(lf/fend pile) |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count    | breakdwn<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 205                    | 41                   | 41                | 41                         | 543                      |
| Chock           | 8x12                  | 5                       | 3.8                   | 1                 | 205                    | 157                  | 41                | 3.8                        | 2492                     |
| Waler           | 12x12                 | 5                       | 5                     | 1                 | 205                    | 205                  | 41                | 5.0                        | 3111                     |
| Block           | 4x12x12               | 5                       | 1                     | 1                 | 205                    | 41                   | 41                | 1.0                        | 607                      |
| Section         | inspection date       |                         | 9/27/96               | end sta = 3111    | end sta = 3966         | NAVSTA               | S-19 through S-21 |                            | run totals<br>(num & lf) |
|                 | 3                     | beg sta =               |                       |                   |                        |                      | total<br>count    | breakdwn<br>(lf/fend pile) |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count    | breakdwn<br>(lf/fend pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 855                    | 171                  | 171               | 171                        | 714                      |
| Chock           | 8x12                  | 5                       | 3.8                   | 1                 | 855                    | 656                  | 171               | 3.8                        | 3147                     |
| Waler           | 12x12                 | 5                       | 5                     | 1                 | 855                    | 855                  | 171               | 5.0                        | 3966                     |
| Block           | 4x12x12               | 5                       | 1                     | 1                 | 855                    | 171                  | 171               | 1.0                        | 778                      |

| Section         | inspection date |                | 9/27/96   |         | end sta = 4106 |              | NAVSTA          |       | S-19 through S-21 |               |
|-----------------|-----------------|----------------|---|---------|----------------|--------------|-----------------|-------|-------------------|---------------|
|                 | 4               | beg sta = 3966 | amt/length  | on ctr. | number         | Sect. length | (num & lf)      | total | breakdwn          | total piles   |
| Timber Material | size/dia.       | dist. on ctr.  | (feet)  | on ctr. | on ctr.        | (feet)       | (num & lf)      | count | (lf/fend pile)    | (for section) |
| Fender Pile     | 14              | 5              | 1   | 1       | 1              | 140          | 28              | 28    |                   | 28            |
| Chock           | 8x12            | 5              | 3.8   | 1       | 1              | 140          | 107             | 28    | 3.8               |               |
| Waler           | 12x12           | 5              | 5   | 1       | 1              | 140          | 140             | 28    | 5.0               |               |
| Block           | 4x12x12         | 5              | 1   | 1       | 1              | 140          | 28              | 28    | 1.0               |               |
|                 |                 |                |   |         |                |              |                 |       |                   |               |
| Section         | inspection date |                | 9/27/96   |         | end sta = 4576 |              | SUBASE          |       | S-19 through S-21 |               |
|                 | 5               | beg sta = 4106 | amt/length  | on ctr. | number         | Sect. length | (num & lf)      | total | breakdwn          | total piles   |
| Timber Material | size/dia.       | dist. on ctr.  | (feet)  | on ctr. | on ctr.        | (feet)       | (num & lf)      | count | (lf/fend pile)    | (for section) |
| Fender Pile     | 14              | 5              | 1   | 1       | 1              | 470          | 94              | 94    |                   | 94            |
| Chock           | 8x12            | 5              | 3.8   | 1       | 1              | 470          | 360             | 94    | 3.8               |               |
| Waler           | 12x12           | 5              | 5   | 2       | 2              | 470          | 940             | 188   | 10.0              |               |
| Block           | 4x12x12         | 5              | 1   | 2       | 2              | 470          | 188             | 188   | 2.0               |               |
|                 |                 |                |   |         |                |              |                 |       |                   |               |
| Section         | inspection date |                | 9/27/96   |         | feet           |              | SUBASE & NAVSTA |       | S-15 through S-21 |               |
|                 | summary         | 0 - 4576       | amount of waterfront using timber fenders (lf) = 4118 |         |                |              |                 |       |                   |               |
| Timber Material | size/dia.       | totals         |   |         |                |              |                 |       |                   |               |
|                 | (inches)        | (num & lf)     |   |         |                |              |                 |       |                   |               |
| Fender Pile     | 18              | 836            |   |         |                |              |                 |       |                   |               |
| Chock           | 8x12            | 3615           |   |         |                |              |                 |       |                   |               |
| Waler           | 12x12           | 5046           |   |         |                |              |                 |       |                   |               |
| Block           | 4x12x12         | 994            |   |         |                |              |                 |       |                   |               |

| Section         | inspection date       |                         | 9/27/96               | end sta = 1075    | FISC                   | K-3 through K-5      | run totals               |
|-----------------|-----------------------|-------------------------|-----------------------|-------------------|------------------------|----------------------|--------------------------|
|                 | 1                     | beg sta = 0             |                       |                   |                        |                      |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 1075                   | 215                  | 221                      |
| Chock           | 8x12                  | 5                       | 3.8                   | 1                 | 1075                   | 824                  | 824                      |
| Waler           | 12x12                 | 5                       | 5                     | 1                 | 1075                   | 1075                 | 1075                     |
| Block           | 4x12x12               | 5                       | 1                     | 1                 | 1075                   | 215                  | 215                      |
|                 |                       |                         |                       |                   |                        |                      |                          |
|                 |                       |                         |                       |                   |                        |                      |                          |
| Section         | inspection date       |                         | 9/27/96               | end sta = 1481    | FISC                   | K-6                  | run totals               |
|                 | 1                     | beg sta = 1075          |                       |                   |                        |                      |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 406                    | 81                   | 81                       |
| Chock           | 8x12                  | 5                       | 3.8                   | 1                 | 406                    | 311                  | 81                       |
| Waler           | 12x12                 | 5                       | 5                     | 1                 | 406                    | 406                  | 81                       |
| Block           | 4x12x12               | 5                       | 1                     | 1                 | 406                    | 81                   | 81                       |
|                 |                       |                         |                       |                   |                        |                      |                          |
|                 |                       |                         |                       |                   |                        |                      |                          |
| Section         | inspection date       |                         | 9/27/96               | end sta = 2116    | FISC                   | K-7                  | run totals               |
|                 | 1                     | beg sta = 1481          |                       |                   |                        |                      |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 635                    | 127                  | 127                      |
| Chock           | 8x12                  | 5                       | 3.8                   | 2                 | 635                    | 1122                 | 293                      |
| Waler           | 12x12                 | 5                       | 5                     | 2                 | 635                    | 1270                 | 254                      |
| Block           | 4x12x12               | 5                       | 1                     | 2                 | 635                    | 254                  | 254                      |
|                 |                       |                         |                       |                   |                        |                      |                          |
|                 |                       |                         |                       |                   |                        |                      |                          |

| Section     | inspection date |                       | 9/27/96                 |                       | 2873              |                        | FISC                 |                | K-8                        |                              | run totals               |  |
|-------------|-----------------|-----------------------|-------------------------|-----------------------|-------------------|------------------------|----------------------|----------------|----------------------------|------------------------------|--------------------------|--|
|             | 1               | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile |                 | 14                    | 5                       | 1                     | 1                 | 757                    | 151                  | 151            |                            | 151                          | 588                      |  |
| Chock       |                 | 8x12                  | 5                       | 3.8                   | 1                 | 757                    | 580                  | 151            | 3.8                        |                              | 2838                     |  |
| Waler       |                 | 12x4                  | 5                       | 5                     | 1                 | 757                    | 757                  | 151            | 5.0                        |                              | 3508                     |  |
| Block       |                 | 4x12x12               | 5                       | 1                     | 1                 | 757                    | 151                  | 151            | 1.0                        |                              | 702                      |  |
|             |                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
| Section     | inspection date |                       | 9/27/96                 |                       | 3226              |                        | FISC                 |                | K-9                        |                              | run totals               |  |
|             | 1               | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile |                 | 14                    | 5                       | 1                     | 1                 | 353                    | 71                   | 71             |                            | 71                           | 658                      |  |
| Chock       |                 | 8x12                  | 5                       | 3.8                   | 1                 | 353                    | 271                  | 71             | 3.8                        |                              | 3108                     |  |
| Waler       |                 | 12x12                 | 5                       | 5                     | 1                 | 353                    | 353                  | 71             | 5.0                        |                              | 3861                     |  |
| Block       |                 | 4x12x12               | 5                       | 1                     | 1                 | 353                    | 71                   | 71             | 1.0                        |                              | 772                      |  |
|             |                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
| Section     | inspection date |                       | 9/27/96                 |                       | 4251              |                        | FISC                 |                | K-10                       |                              | run totals               |  |
|             | 1               | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile |                 | 14                    | 5                       | 1                     | 1                 | 1025                   | 205                  | 205            |                            | 205                          | 863                      |  |
| Chock       |                 | 8x12                  | 5                       | 3.8                   | 1                 | 1025                   | 786                  | 205            | 3.8                        |                              | 3894                     |  |
| Waler       |                 | 12x12                 | 5                       | 5                     | 1                 | 1025                   | 1025                 | 205            | 5.0                        |                              | 4886                     |  |
| Block       |                 | 4x12x12               | 5                       | 1                     | 1                 | 1025                   | 205                  | 205            | 1.0                        |                              | 977                      |  |

| Section         | inspection date       |   | 9/27/96 | feet | FISC | K-3 through K-10 |  |
|-----------------|-----------------------|---|---------|------|------|------------------|--|
|                 | summary               | 0 - 4251  |         |      |      |                  |  |
|                 |                       | amount of waterfront using timber fenders (lf) = 4251 |         |      |      |                  |  |
| Timber Material | size/dia.<br>(inches) | totals<br>(num & lf)                                  |         |      |      |                  |  |
| Fender Pile     | 18                    | 863   |         |      |      |                  |  |
| Chock           | 8x12                  | 3894  |         |      |      |                  |  |
| Water           | 12x12                 | 4886  |         |      |      |                  |  |
| Block           | 4x12x12               | 977   |         |      |      |                  |  |

| Section         | inspection date       |                         | 9/28/96               | end sta = 575 |         | NAVSTA               | F-1                        | run totals<br>(num & lf) |
|-----------------|-----------------------|-------------------------|-----------------------|---------------|---------|----------------------|----------------------------|--------------------------|
|                 | 1                     | beg sta = 0             |                       | number        | on ctr. |                      |                            |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number        | on ctr. | totals<br>(num & lf) | breakdwn<br>(lf/feet pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5.5                     | 1                     | 1             |         | 105                  | 111                        | 191                      |
| Pile cluster    | 14                    | 50                      | 7                     | 7             |         | 12                   | 81                         |                          |
| Chock           | 8x12                  | 5.5                     | 4.3                   | 1             |         | 453                  | 105                        | 453                      |
| Waler           | 12x12                 | 5.5                     | 5.5                   | 1             |         | 575                  | 105                        | 575                      |
| Block           | 4x12x12               | 6.5                     | 1                     | 1             |         | 88                   | 88                         | 88                       |
| Section         | inspection date       |                         | 9/28/96               | end sta = 645 |         | NAVSTA               | F-9                        | run totals<br>(num & lf) |
|                 | 1                     | beg sta = 575           |                       | number        | on ctr. |                      |                            |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number        | on ctr. | totals<br>(num & lf) | breakdwn<br>(lf/feet pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1             |         | 14                   | 14                         | 205                      |
| Chock           | 8x12                  | 5                       | 3.8                   | 1             |         | 54                   | 14                         | 507                      |
| Waler           | 12x12                 | 5                       | 5                     | 1             |         | 70                   | 14                         | 645                      |
| Block           | 4x12x12               | 3                       | 1                     | 1             |         | 23                   | 23                         | 112                      |
| Section         | inspection date       |                         | 9/28/96               | end sta = 942 |         | NAVSTA               | F-9                        | run totals<br>(num & lf) |
|                 | 2                     | beg sta = 645           |                       | number        | on ctr. |                      |                            |                          |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number        | on ctr. | totals<br>(num & lf) | breakdwn<br>(lf/feet pile) | run totals<br>(num & lf) |
| Fender Pile     | 14                    | 5                       | 1                     | 1             |         | 59                   | 59                         | 271                      |
| Chock           | 8x12                  | 5                       | 3.8                   | 2             |         | 525                  | 137                        | 1031                     |
| Waler           | 12x12                 | 5                       | 5                     | 2             |         | 594                  | 119                        | 1239                     |
| Block           | 4x12x12               | 6                       | 1                     | 2             |         | 99                   | 99                         | 211                      |



| Section         | inspection date       |                         | 9/28/96               |                   | end sta =              | 1232                 | NAVSTA         |                            | F-10                         |                          |  |
|-----------------|-----------------------|-------------------------|-----------------------|-------------------|------------------------|----------------------|----------------|----------------------------|------------------------------|--------------------------|--|
|                 | 1                     | beg sta =               | 942                   |                   |                        |                      |                |                            |                              |                          |  |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 290                    | 58                   | 58             |                            | 58                           | 329                      |  |
| Chock           | 8x12                  | 5                       | 3.8                   | 1                 | 290                    | 222                  | 58             | 3.8                        |                              | 1254                     |  |
| Waler           | 12x4                  | 5                       | 5                     | 1                 | 290                    | 290                  | 58             | 5.0                        |                              | 1529                     |  |
| Block           | 4x12x12               | 5                       | 1                     | 1                 | 290                    | 58                   | 58             | 1.0                        |                              | 269                      |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
| Section         | inspection date       |                         | 9/28/96               |                   | end sta =              | 1732                 | NAVSTA         | F-10                       |                              |                          |  |
| 2               | beg sta =             | 1232                    |                       |                   |                        |                      |                |                            |                              |                          |  |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 500                    | 100                  | 100            |                            | 100                          | 429                      |  |
| Chock           | 8x12                  | 5                       | 3.8                   | 1                 | 500                    | 383                  | 100            | 3.8                        |                              | 1637                     |  |
| Waler           | 12x12                 | 5                       | 5                     | 1                 | 500                    | 500                  | 100            | 5.0                        |                              | 2029                     |  |
| Block           | 4x12x12               | 6                       | 1                     | 1                 | 500                    | 83                   | 83             | 0.8                        |                              | 352                      |  |
|                 |                       |                         |                       |                   |                        |                      |                |                            |                              |                          |  |
| Section         | inspection date       |                         | 9/28/96               |                   | end sta =              | 1787                 | NAVSTA         | F-12 through F-13          |                              |                          |  |
| 1               | beg sta =             | 1732                    |                       |                   |                        |                      |                |                            |                              |                          |  |
| Timber Material | size/dia.<br>(inches) | dist. on ctr.<br>(feet) | amt/length<br>on ctr. | number<br>on ctr. | Sect. length<br>(feet) | totals<br>(num & lf) | total<br>count | breakdwn<br>(lf/fend pile) | total piles<br>(for section) | run totals<br>(num & lf) |  |
| Fender Pile     | 14                    | 5                       | 1                     | 1                 | 55                     | 11                   | 11             |                            | 11                           | 440                      |  |
| Chock           | 8x12                  | 5                       | 3.8                   |                   | 55                     |                      |                |                            |                              | 1637                     |  |
| Waler           | 12x12                 | 5                       | 5                     | 1                 | 55                     | 55                   | 11             | 5.0                        |                              | 2084                     |  |
| Block           | 4x12x12               | 5                       | 1                     | 1                 | 55                     | 11                   | 11             | 1.0                        |                              | 363                      |  |

| Section         | inspection date |   | 9/28/96    | end sta = 3167 | NAVSTA     |                | F-12 through F-13 |            |
|-----------------|-----------------|---|------------|----------------|------------|----------------|-------------------|------------|
| Timber Material | 2               | beg sta = 1787  | amt/length | number         | total      | breakdwn       | total piles       | run totals |
|                 | size/dia.       | dist. on ctr.   | on ctr.    | on ctr.        | (num & lf) | (lf/fend pile) | (for section)     | (num & lf) |
|                 | (inches)        | (feet)  |            |                |            |                |                   |            |
|                 |                 |   |            |                |            |                |                   |            |
|                 |                 |   |            |                |            |                |                   |            |
| Fender Pile     | 14              | 5   | 1          | 1              | 276        | 276            | 276               | 716        |
| Chock           | 8x12            | 5   | 3.8        | 1              | 1058       | 276            | 3.8               | 2695       |
| Waler           | 12x12           | 5   | 5          | 1              | 1380       | 276            | 5.0               | 3464       |
| Block           | 4x12x12         | 5   | 1          | 1              | 276        | 276            | 1.0               | 639        |
|                 |                 |   |            |                |            |                |                   |            |
| Section         | inspection date |   | 9/28/96    | feet           | FISC       |                | F-12 through F-13 |            |
|                 | summary         | 0 - 3167  |            |                |            |                |                   |            |
|                 |                 | amount of waterfront using timber fenders (lf) = 3167 |            |                |            |                |                   |            |
| Timber Material | size/dia.       | totals  |            |                |            |                |                   |            |
|                 | (inches)        | (num & lf)  |            |                |            |                |                   |            |
|                 |                 |   |            |                |            |                |                   |            |
|                 |                 |   |            |                |            |                |                   |            |
|                 |                 |   |            |                |            |                |                   |            |
| Fender Pile     | 18              | 716   |            |                |            |                |                   |            |
| Chock           | 8x12            | 2695  |            |                |            |                |                   |            |
| Waler           | 12x12           | 3464  |            |                |            |                |                   |            |
| Block           | 4x12x12         | 639   |            |                |            |                |                   |            |

## Timber Summary Summary

|                  |         |         |         |
|------------------|---------|---------|---------|
| inspection dates | 9/21/96 | 9/22/96 | 9/27/96 |
|------------------|---------|---------|---------|

|   |        |      |
|---|--------|------|
|   | (lf)   | (mi) |
| surveyed amount of waterfront using timber fenders (lf) = | 19,643 | 3.7  |

| <b>Timber Material</b> | <b>size/dia.</b><br>(inches) | <b>totals</b><br>(num & lf) | <b>totals</b><br>(num & mi) |
|------------------------|------------------------------|-----------------------------|-----------------------------|
| Fender Pile            | 14-18                        | 4,713                       | 4,713                       |
| Waler                  | 12x12                        | 23,159                      | 4.4                         |
| Chock                  | 8x12                         | 18,588                      | 3.5                         |
| Block                  | 4x12x12                      | 3,921                       | 0.7                         |

## Appendix B

### Fender Replacement Activity Cost Estimation

**Timber Pile Maintenance Costs**

assume typical: single waler, chock; piles &amp; blocks @ 5' on center

assume number of piles replaced = 10

| Material                          | cost, ea. | cost/lf | length<br>(lf) | number<br>per sect. | cost<br>totals   |
|-----------------------------------|-----------|---------|----------------|---------------------|------------------|
| pile, timber - 65'                | 886.28    | 13.64   | 65             |                     | 8,862.80         |
| waler, 12"x12"x20'                | 267.84    | 13.39   | 5              |                     | 669.60           |
| chock, 8"x12"x20'                 | 208.92    | 10.45   | 3.8            |                     | 400.43           |
| block, 4"x12"x20'                 | 147.96    | 7.40    | 1              |                     | 73.98            |
| bolt, galvanized, 1"x29" (w/ nut) | 12.10     |         |                | 3                   | 363.00           |
| bolts, 'T', 1"x17"                | 8.80      |         |                | 1                   | 88.00            |
| washer, 1"                        | 3.60      |         |                | 4                   | 144.00           |
| staples, 3/8"x1"x3" (2-per pile)  | 1.72      |         |                | 2                   | 34.40            |
| line, manila, 3/4" (6'-per pile)  |           | 0.53    | 6              |                     | 31.80            |
| <b>sub total</b>                  |           |         |                |                     | <b>10,668.01</b> |

10,006.81

661.20

10668.01

| Activity # | 1 | Draw, Load, Transport Materials       | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals |
|------------|---|---------------------------------------|-----------------|--------------|-------------------|--------------------|----------------|
|            |   | truck forklift 6000 180" gas          | 4.00            | 1            | 4.00              | 4.00               | 16.00          |
|            |   | operator, specific work straight time | 51.37           | 2            | 102.74            | 4.00               | 410.96         |
|            |   | truck tractor DED 32000 GVW Min       | 4.90            | 1            | 4.90              | 4.00               | 19.60          |
|            |   | semitrailer lowbed 2 axle 35T         | 2.50            | 1            | 6.25              | 4.00               | 25.00          |
|            |   | driver, specific work straight time   | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | <b>subtotal</b>                       |                 |              |                   |                    | <b>677.04</b>  |

| Activity # | 2 | Staging Materials                     | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals |
|------------|---|---------------------------------------|-----------------|--------------|-------------------|--------------------|----------------|
|            |   | truck forklift 6000 180" gas          | 4.00            | 1            | 4.00              | 4.00               | 16.00          |
|            |   | operator, specific work straight time | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | truck tractor DED 32000 GVW Min       | 4.90            | 1            | 4.90              | 4.00               | 19.60          |
|            |   | semitrailer lowbed 2 axle 35T         | 2.50            | 1            | 6.25              | 4.00               | 25.00          |
|            |   | driver, specific work straight time   | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | <b>subtotal</b>                       |                 |              |                   |                    | <b>471.56</b>  |

| Activity # | 3 | Mobilization                               | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals |
|------------|---|--|-----------------|--------------|-------------------|--------------------|----------------|
|            |   | crane truck mtd 2-eng prt 35 ton cap       | 47.78           | 1            | 47.78             | 4.00               | 191.12         |
|            |   | operator, specific work straight time      | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | truck tractor DED 32000 GVW Min            | 4.90            | 1            | 4.90              | 4.00               | 19.60          |
|            |   | semitrailer lowbed 2 axle 35T              | 2.50            | 1            | 6.25              | 4.00               | 25.00          |
|            |   | driver, specific work straight time        | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | compressor air 600 cfm portable            | 6.15            | 1            | 6.15              | 4.00               | 24.60          |
|            |   | hammer pile extractor diesel               | 1.00            | 1            | 1.00              | 4.00               | 4.00           |
|            |   | hammer pile extractor diesel               | 1.00            | 1            | 1.00              | 4.00               | 4.00           |
|            |   | wharf builder, specific work straight time | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | <b>subtotal</b>                            |                 |              |                   |                    | <b>884.76</b>  |

| Activity # | 4 | Demolition                                 | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals  |
|------------|---|--|-----------------|--------------|-------------------|--------------------|-----------------|
|            |   | crane truck mtd 2-eng prt 35 ton cap       | 47.78           | 1            | 47.78             | 8.00               | 382.24          |
|            |   | operator, specific work straight time      | 51.37           | 1            | 51.37             | 8.00               | 410.96          |
|            |   | compressor air 600 cfm portable            | 6.15            | 1            | 6.15              | 8.00               | 49.20           |
|            |   | hammer pile extractor diesel               | 1.00            | 1            | 1.00              | 8.00               | 8.00            |
|            |   | wharf builder, specific work straight time | 51.37           | 4            | 205.48            | 8.00               | 1,643.84        |
|            |   | <b>subtotal</b>                            |                 |              |                   |                    | <b>2,494.24</b> |

| Activity # | 5 | Cosnstruction                              | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals  |
|------------|---|--|-----------------|--------------|-------------------|--------------------|-----------------|
|            |   | crane truck mtd 2-eng prt 35 ton cap       | 47.78           | 1            | 47.78             | 8.00               | 382.24          |
|            |   | operator, specific work straight time      | 51.37           | 1            | 51.37             | 8.00               | 410.96          |
|            |   | compressor air 600 cfm portable            | 6.15            | 1            | 6.15              | 8.00               | 49.20           |
|            |   | hammer pile driver diesel                  | 1.00            | 1            | 1.00              | 8.00               | 8.00            |
|            |   | wharf builder, specific work straight time | 51.37           | 4            | 205.48            | 8.00               | 1,643.84        |
|            |   | <b>subtotal</b>                            |                 |              |                   |                    | <b>2,494.24</b> |

| Activity # | 6 | Load, Transport Debris to Pearl City  | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals |
|------------|---|---------------------------------------|-----------------|--------------|-------------------|--------------------|----------------|
|            |   | truck forklift 6000 180" gas          | 4.00            | 1            | 4.00              | 4.00               | 16.00          |
|            |   | operator, specific work straight time | 51.37           | 2            | 102.74            | 4.00               | 410.96         |
|            |   | truck tractor DED 32000 GVW Min       | 4.90            | 1            | 4.90              | 4.00               | 19.60          |
|            |   | semitrailer rear dump 34 cuyd         | 6.00            | 1            | 6.00              | 4.00               | 24.00          |
|            |   | driver, specific work straight time   | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | <b>subtotal</b>                       |                 |              |                   |                    | <b>676.04</b>  |

| Activity # | 7 | Prep Debris @ Pearl City for Dump          | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals |
|------------|---|--|-----------------|--------------|-------------------|--------------------|----------------|
|            |   | truck forklift 6000 180" gas               | 4.00            | 1            | 4.00              | 4.00               | 16.00          |
|            |   | operator, specific work straight time      | 51.37           | 2            | 102.74            | 4.00               | 410.96         |
|            |   | truck tractor DED 32000 GVW Min            | 4.90            | 1            | 4.90              | 4.00               | 19.60          |
|            |   | semitrailer rear dump 34 cuyd              | 6.00            | 1            | 6.00              | 4.00               | 24.00          |
|            |   | driver, specific work straight time        | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | wharf builder, specific work straight time | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | <b>subtotal</b>                            |                 |              |                   |                    | <b>881.52</b>  |

| Activity # | 8 | Load, Transport Debris to Dump        | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals |
|------------|---|---------------------------------------|-----------------|--------------|-------------------|--------------------|----------------|
|            |   | truck forklift 6000 180" gas          | 4.00            | 1            | 4.00              | 4.00               | 16.00          |
|            |   | operator, specific work straight time | 51.37           | 2            | 102.74            | 4.00               | 410.96         |
|            |   | truck tractor DED 32000 GVW Min       | 4.90            | 1            | 4.90              | 4.00               | 19.60          |
|            |   | semitrailer rear dump 34 cuyd         | 6.00            | 1            | 6.00              | 4.00               | 24.00          |
|            |   | driver, specific work straight time   | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | <b>subtotal</b>                       |                 |              |                   |                    | <b>676.04</b>  |

| Activity # | 9 | Dump Cost        | weight<br>per lf | cost<br>per ton | cost<br>per lb. | length<br>(lf) | cost<br>totals |
|------------|---|------------------|------------------|-----------------|-----------------|----------------|----------------|
|            |   | pile, timber     | 45               | 57.00           | 0.03            | 650            | 833.63         |
|            |   | waler, 12"x12"   | 42               | 57.00           | 0.03            | 50             | 59.99          |
|            |   | chock, 8"x12"    | 28               | 57.00           | 0.03            | 38             | 30.73          |
|            |   | block, 4"x12"    | 14               | 57.00           | 0.03            | 10             | 4.02           |
|            |   | <b>sub total</b> |                  |                 |                 |                | <b>928.37</b>  |

#### Timber Pile Fender Life Cycle Cost Summary

|                                |               |
|--------------------------------|---------------|
| Total Material Costs           | 10,668        |
| Total Construction Costs       | 7,698         |
| Total Disposal Costs           | 2,486         |
| <b>Total Cost For 10 Piles</b> | <b>20,852</b> |

## Seapile Maintenance Costs - No Recycling Assumed

assume typical: single waler, chock; piles &amp; blocks @ 5' on center

assume number of piles replaced = 10

| Material                                  | cost, ea. | cost/lf | length<br>(lf) | number<br>per sect. | cost<br>totals |
|---|-----------|---------|----------------|---------------------|----------------|
| pile, plastic - 65' w/ 8-1.25" fibr rebar | 2,925.00  | 45.00   | 65             |                     | 29,250.00      |
| waler, 12"x12"x20' w/ 8-1.0" fibr rebar   | 900.00    | 45.00   | 5              |                     | 2,250.00       |
| chock, 8"x12"x20'                         | 800.00    | 40.00   | 3.9            |                     | 1,566.67       |
| block, 4"x12"x20'                         | 360.00    | 18.00   | 1              |                     | 180.00         |
| bolt, galvanized, 1"x29" (w/ nut)         | 12.10     |         |                | 3                   | 363.00         |
| bolts, 'T', 1"x17"                        | 8.80      |         |                | 1                   | 88.00          |
| washer, 1"                                | 3.60      |         |                | 4                   | 144.00         |
| staples, 3/8"x1"x3" (2-per pile)          | 1.72      |         |                | 2                   | 34.40          |
| line, manila, 3/4" (6'-per pile)          |           | 0.53    | 6              |                     | 31.80          |
| sub total                                 |           |         |                |                     | 33,907.87      |

| Activity # | 1 | Draw, Load, Transport Materials       | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals |
|------------|---|---------------------------------------|-----------------|--------------|-------------------|--------------------|----------------|
|            |   | truck forklift 6000 180" gas          | 4.00            | 1            | 4.00              | 4.00               | 16.00          |
|            |   | operator, specific work straight time | 51.37           | 2            | 102.74            | 4.00               | 410.96         |
|            |   | truck tractor DED 32000 GVW Min       | 4.90            | 1            | 4.90              | 4.00               | 19.60          |
|            |   | semitrailer lowbed 2 axle 35T         | 2.50            | 1            | 6.25              | 4.00               | 25.00          |
|            |   | driver, specific work straight time   | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | subtotal                              |                 |              |                   |                    | 677.04         |

| Activity # | 2 | Staging Materials                     | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals |
|------------|---|---------------------------------------|-----------------|--------------|-------------------|--------------------|----------------|
|            |   | truck forklift 6000 180" gas          | 4.00            | 1            | 4.00              | 4.00               | 16.00          |
|            |   | operator, specific work straight time | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | truck tractor DED 32000 GVW Min       | 4.90            | 1            | 4.90              | 4.00               | 19.60          |
|            |   | semitrailer lowbed 2 axle 35T         | 2.50            | 1            | 6.25              | 4.00               | 25.00          |
|            |   | driver, specific work straight time   | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | subtotal                              |                 |              |                   |                    | 471.56         |

| Activity # | 3 | Mobilization                               | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals |
|------------|---|--|-----------------|--------------|-------------------|--------------------|----------------|
|            |   | crane truck mtd 2-eng prt 35 ton cap       | 47.78           | 1            | 47.78             | 4.00               | 191.12         |
|            |   | operator, specific work straight time      | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | truck tractor DED 32000 GVW Min            | 4.90            | 1            | 4.90              | 4.00               | 19.60          |
|            |   | semitrailer lowbed 2 axle 35T              | 2.50            | 1            | 6.25              | 4.00               | 25.00          |
|            |   | driver, specific work straight time        | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | compressor air 600 cfm portable            | 6.15            | 1            | 6.15              | 4.00               | 24.60          |
|            |   | hammer pile driver diesel                  | 1.00            | 1            | 1.00              | 4.00               | 4.00           |
|            |   | hammer pile extractor diesel               | 1.00            | 1            | 1.00              | 4.00               | 4.00           |
|            |   | wharf builder, specific work straight time | 51.37           | 1            | 51.37             | 4.00               | 205.48         |
|            |   | subtotal                                   |                 |              |                   |                    | 884.76         |

| Activity # | 4 | Demolition                                 | cost<br>per hr. | num.<br>req. | sub. tot.<br>cost | duration<br>(hrs.) | cost<br>totals |
|------------|---|--|-----------------|--------------|-------------------|--------------------|----------------|
|            |   | crane truck mtd 2-eng prt 35 ton cap       | 47.78           | 1            | 47.78             | 8.00               | 382.24         |
|            |   | operator, specific work straight time      | 51.37           | 1            | 51.37             | 8.00               | 410.96         |
|            |   | compressor air 600 cfm portable            | 6.15            | 1            | 6.15              | 8.00               | 49.20          |
|            |   | hammer pile extractor diesel               | 1.00            | 1            | 1.00              | 8.00               | 8.00           |
|            |   | wharf builder, specific work straight time | 51.37           | 4            | 205.48            | 8.00               | 1643.84        |
|            |   | subtotal                                   |                 |              |                   |                    | 2494.24        |

| Activity # | 5 | Cosnstruction                              | cost    | num. | sub. tot. | duration | cost           |
|------------|---|--|---------|------|-----------|----------|----------------|
|            |   |  | per hr. | req. | cost      | (hrs.)   | totals         |
|            |   | crane truck mtd 2-eng prt 35 ton cap       | 47.78   | 1    | 47.78     | 8.00     | 382.24         |
|            |   | operator, specific work straight time      | 51.37   | 1    | 51.37     | 8.00     | 410.96         |
|            |   | compressor air 600 cfm portable            | 6.15    | 1    | 6.15      | 8.00     | 49.20          |
|            |   | hammer pile driver diesel                  | 1.00    | 1    | 1.00      | 8.00     | 8.00           |
|            |   | wharf builder, specific work straight time | 51.37   | 4    | 205.48    | 8.00     | 1643.84        |
|            |   | <b>subtotal</b>                            |         |      |           |          | <b>2494.24</b> |

| Activity # | 6 | Load, Transport Debris to Pearl City  | cost    | num. | sub. tot. | duration | cost          |
|------------|---|---------------------------------------|---------|------|-----------|----------|---------------|
|            |   |                                       | per hr. | req. | cost      | (hrs.)   | totals        |
|            |   | truck forklift 6000 180" gas          | 4.00    | 1    | 4.00      | 4.00     | 16.00         |
|            |   | operator, specific work straight time | 51.37   | 2    | 102.74    | 4.00     | 410.96        |
|            |   | truck tractor DED 32000 GVW Min       | 4.90    | 1    | 4.90      | 4.00     | 19.60         |
|            |   | semitrailer rear dump 34 cuyd         | 6.00    | 1    | 6.00      | 4.00     | 24.00         |
|            |   | driver, specific work straight time   | 51.37   | 1    | 51.37     | 4.00     | 205.48        |
|            |   | <b>subtotal</b>                       |         |      |           |          | <b>676.04</b> |

| Activity # | 7 | Prep Debris @ Pearl City for Dump          | cost    | num. | sub. tot. | duration | cost          |
|------------|---|--|---------|------|-----------|----------|---------------|
|            |   |  | per hr. | req. | cost      | (hrs.)   | totals        |
|            |   | truck forklift 6000 180" gas               | 4.00    | 1    | 4.00      | 4.00     | 16.00         |
|            |   | operator, specific work straight time      | 51.37   | 2    | 102.74    | 4.00     | 410.96        |
|            |   | truck tractor DED 32000 GVW Min            | 4.90    | 1    | 4.90      | 4.00     | 19.60         |
|            |   | semitrailer rear dump 34 cuyd              | 6.00    | 1    | 6.00      | 4.00     | 24.00         |
|            |   | driver, specific work straight time        | 51.37   | 1    | 51.37     | 4.00     | 205.48        |
|            |   | wharf builder, specific work straight time | 51.37   | 1    | 51.37     | 4.00     | 205.48        |
|            |   | <b>subtotal</b>                            |         |      |           |          | <b>881.52</b> |

| Activity # | 8 | Load, Transport Debris to Dump        | cost    | num. | sub. tot. | duration | cost          |
|------------|---|---------------------------------------|---------|------|-----------|----------|---------------|
|            |   |                                       | per hr. | req. | cost      | (hrs.)   | totals        |
|            |   | truck forklift 6000 180" gas          | 4.00    | 1    | 4.00      | 4.00     | 16.00         |
|            |   | operator, specific work straight time | 51.37   | 2    | 102.74    | 4.00     | 410.96        |
|            |   | truck tractor DED 32000 GVW Min       | 4.90    | 1    | 4.90      | 4.00     | 19.60         |
|            |   | semitrailer rear dump 34 cuyd         | 6.00    | 1    | 6.00      | 4.00     | 24.00         |
|            |   | driver, specific work straight time   | 51.37   | 1    | 51.37     | 4.00     | 205.48        |
|            |   | <b>subtotal</b>                       |         |      |           |          | <b>676.04</b> |

| Activity # | 9 | Dump Cost        | weight | cost    | cost    | length | cost          |
|------------|---|------------------|--------|---------|---------|--------|---------------|
|            |   |                  | per lf | per ton | per lb. | (lf)   | totals        |
|            |   | pile, plastic    | 33     | 57.00   | 0.03    | 650    | 611.33        |
|            |   | waler, 12"x12"   | 41     | 57.00   | 0.03    | 50     | 58.43         |
|            |   | chock, 8"x12"    | 32     | 57.00   | 0.03    | 39     | 35.72         |
|            |   | block, 4"x12"    | 16     | 57.00   | 0.03    | 10     | 4.56          |
|            |   | <b>sub total</b> |        |         |         |        | <b>710.03</b> |

#### Plastic Pile Fender Life Cycle Cost Summary

|                          |               |
|--------------------------|---------------|
| Total Material Costs     | 33,908        |
| Total Construction Costs | 7,698         |
| Total Disposal Costs     | 2,268         |
| Total Cost For 10 Piles  | <b>43,873</b> |



## Appendix C

### Fender Maintenance Economic Analysis

$$P = C + \frac{M(1+j)^n}{(1+i)^n}$$

| replacement year | $P = C + M(1 + j)^n$<br>$(1+i)^n$ | Total Cost<br>(cum P) |
|------------------|-----------------------------------|-----------------------|
| 0                | 2,085                             | 2,085                 |
| 3                | 2,445                             | 4,530                 |
| 6                | 2,933                             | 7,463                 |
| 9                | 3,597                             | 11,060                |
| 12               | 4,500                             | 15,560                |
| 15               | 5,727                             | 21,287                |
| 18               | 7,394                             | 28,681                |
| 21               | 9,660                             | 38,341                |
| 24               | 12,741                            | 51,082                |
| 27               | 16,928                            | 68,010                |
| 30               | 22,619                            | 90,629                |
| 33               | 30,354                            | 120,983               |
| 36               | 40,868                            | 161,850               |
| 39               | 55,158                            | 217,008               |
| 42               | 74,581                            | 291,589               |
| 45               | 100,981                           | 392,570               |
| 48               | 136,864                           | 529,433               |

|  |                 |
|--|-----------------|
| <b>pile life</b>                                 | <b>5</b>        |
| number of piles estimated                        | 10              |
| <b>inflation rate (i)</b>                        | <b>3.70%</b>    |
| <b>timber material inflation rate (j)</b>        | <b>14.87%</b>   |
| <b>timber material costs per pile (M)</b>        | <b>1,000.68</b> |
| other material costs per pile                    | 66.12           |
| total material costs per pile                    | 1,067           |
| total construction costs per pile                | 770             |
| total disposal costs per pile                    | 249             |
| <b>total disp.const,other costs per pile (C)</b> | <b>1,085</b>    |
| total cost per pile                              | 2,085           |

$$P = \frac{C + M(1 + i)^n}{(1 + i)^n}$$

| replacement<br>year | $P = C + M(1 + i)^n$<br>$(1+i)^n$ | Total Cost<br>(cum P) |
|---------------------|-----------------------------------|-----------------------|
| 0                   | 2,085                             | 2,085                 |
| 5                   | 2,753                             | <b>4,839</b>          |
| 10                  | 3,868                             | 8,706                 |
| 15                  | 5,727                             | <b>14,433</b>         |
| 20                  | 8,826                             | 23,260                |
| 25                  | 13,996                            | <b>37,256</b>         |
| 30                  | 22,619                            | 59,875                |
| 35                  | 36,999                            | <b>96,874</b>         |
| 40                  | 60,982                            | 157,856               |
| 45                  | 100,981                           | <b>258,837</b>        |

|   |       |
|---|-------|
| pile life                                 | 10    |
| number of piles estimated                 | 10    |
| inflation rate (i)                        | 0.00% |
| material inflation rate (j)               | 0.00% |
| plastic material costs per pile (M)       | 3,325 |
| other material costs per pile             | 66.12 |
| total material costs per pile             | 3,391 |
| total construction costs per pile         | 770   |
| total disposal costs per pile             | 227   |
| total disp.const,other costs per pile (C) | 1,063 |
| total cost per pile                       | 4,387 |

$$P = \frac{C + M(1 + i)^n}{(1 + i)^n}$$

| replacement<br>year | $P = C + M(1 + i)^n$ | $(1+i)^n$ | Total Cost<br><u>(cum P)</u> |
|---------------------|----------------------|-----------|------------------------------|
| 0                   | 4,387                | 4,387     | 4,387                        |
| 10                  | 4,387                | 4,387     | 8,775                        |
| 20                  | 4,387                | 4,387     | 13,162                       |
| 30                  | 4,387                | 4,387     | 17,549                       |
| 40                  | 4,387                | 4,387     | 21,937                       |

| Plastic (no recycle)          |                               |                                   |                               | Plastic (recycle)             |                               |                                   |                               | Plastic (recycle)             |                               |                                   |                               |
|-------------------------------|-------------------------------|-----------------------------------|-------------------------------|-------------------------------|-------------------------------|-----------------------------------|-------------------------------|-------------------------------|-------------------------------|-----------------------------------|-------------------------------|
| Plastic (no recycle)          |                               |                                   |                               | Plastic (recycle)             |                               |                                   |                               | Plastic (recycle)             |                               |                                   |                               |
| pile life                     | number of piles estimated     | inflation rate (i)                | material inflation rate (j)   | pile life                     | number of piles estimated     | inflation rate (i)                | material inflation rate (j)   | pile life                     | number of piles estimated     | inflation rate (i)                | material inflation rate (j)   |
| 25                            | 10                            | 0.00%                             | 0.00%                         | 10                            | 10                            | 0.00%                             | 0.00%                         | 25                            | 10                            | 0.00%                             | 0.00%                         |
| 3,325                         | 3,325                         | 66.12                             | 3,391                         | 3,325                         | 66.12                         | 3,391                             | 770                           | 3,325                         | 66.12                         | 3,391                             | 770                           |
| other material costs per pile | total material costs per pile | total construction costs per pile | total disposal costs per pile | other material costs per pile | total material costs per pile | total construction costs per pile | total disposal costs per pile | other material costs per pile | total material costs per pile | total construction costs per pile | total disposal costs per pile |
| 3,391                         | 770                           | 227                               | 1,063                         | 3,391                         | 770                           | 227                               | 1,063                         | 3,391                         | 770                           | 227                               | 1,063                         |
| total cost per pile           | total cost per pile           | total cost per pile               | total cost per pile           | total cost per pile           | total cost per pile           | total cost per pile               | total cost per pile           | total cost per pile           | total cost per pile           | total cost per pile               | total cost per pile           |
| 4,387                         | 4,387                         | 4,387                             | 4,387                         | 4,161                         | 4,161                         | 4,161                             | 4,161                         | 4,161                         | 4,161                         | 4,161                             | 4,161                         |
| P = C+M(1+i) <sup>n</sup>     |                               |                                   |                               | P = C+M(1+i) <sup>n</sup>     |                               |                                   |                               | P = C+M(1+i) <sup>n</sup>     |                               |                                   |                               |
| replacement                   | year                          | (1+i) <sup>n</sup>                | Total Cost                    | replacement                   | year                          | (1+i) <sup>n</sup>                | Total Cost                    | replacement                   | year                          | (1+i) <sup>n</sup>                | Total Cost                    |
| 0                             | 0                             | 4,387                             | 4,387                         | 0                             | 0                             | 4,161                             | 4,161                         | 0                             | 0                             | 4,161                             | 4,161                         |
| 25                            | 25                            | 4,387                             | 8,775                         | 10                            | 10                            | 4,161                             | 8,322                         | 25                            | 25                            | 4,161                             | 8,322                         |
|                               |                               |                                   |                               | 20                            | 20                            | 4,161                             | 12,483                        |                               |                               |                                   |                               |
|                               |                               |                                   |                               | 30                            | 30                            | 4,161                             | 16,644                        |                               |                               |                                   |                               |
|                               |                               |                                   |                               | 40                            | 40                            | 4,161                             | 20,805                        |                               |                               |                                   |                               |

econ analys

plot - 10 pile job (no recycle)

| Remaining<br>Design Life | timber<br>3 yr | timber<br>5 yr | plastic<br>10 yr | plastic<br>25 yr |
|--------------------------|----------------|----------------|------------------|------------------|
| 10                       | 11,060         | 4,839          | 4,387            | 4,387            |
| 20                       | 28,681         | 14,433         | 8,775            | 4,387            |
| 30                       | 68,010         | 37,256         | 13,162           | 8,775            |
| 40                       | 217,008        | 96,874         | 17,549           | 8,775            |
| 50                       | 529,433        | 258,837        | 21,937           | 8,775            |

plot - 10 pile job (recycle)

| Remaining<br>Design Life | timber<br>3 yr | timber<br>5 yr | plastic<br>10 yr | plastic<br>25 yr |
|--------------------------|----------------|----------------|------------------|------------------|
| 10                       | 11,060         | 4,839          | 4,161            | 4,161            |
| 20                       | 28,681         | 14,433         | 8,322            | 4,161            |
| 30                       | 68,010         | 37,256         | 12,483           | 8,322            |
| 40                       | 217,008        | 96,874         | 16,644           | 8,322            |
| 50                       | 529,433        | 258,837        | 20,805           | 8,322            |

## plot - 10 pile job (no recycle)

| Remaining<br>Design Life | timber<br>3 yr | timber<br>5 yr | plastic<br>10 yr | plastic<br>25 yr |
|--------------------------|----------------|----------------|------------------|------------------|
| 10                       | 11,060         | 4,839          | 4,387            | 4,387            |
| 20                       | 28,681         | 14,433         | 8,775            | 4,387            |
| 30                       | 68,010         | 37,256         | 13,162           | 8,775            |
| 40                       | 217,008        | 96,874         | 17,549           | 8,775            |
| 50                       | 529,433        | 258,837        | 21,937           | 8,775            |

## plot - 10 pile job (recycle)

| Remaining<br>Design Life | timber<br>3 yr | timber<br>5 yr | plastic<br>10 yr | plastic<br>25 yr |
|--------------------------|----------------|----------------|------------------|------------------|
| 10                       | 11,060         | 4,839          | 4,161            | 4,161            |
| 20                       | 28,681         | 14,433         | 8,322            | 4,161            |
| 30                       | 68,010         | 37,256         | 12,483           | 8,322            |
| 40                       | 217,008        | 96,874         | 16,644           | 8,322            |
| 50                       | 529,433        | 258,837        | 20,805           | 8,322            |

replacement P = C+M(1 Total Cost  
year (1+i (cum P)

|    |         |         |
|----|---------|---------|
|    | 2,085   | 2,085   |
| 3  | 2,445   | 4,530   |
| 6  | 2,933   | 7,463   |
| 9  | 3,597   | 11,060  |
| 12 | 4,500   | 15,560  |
| 15 | 5,727   | 21,287  |
| 18 | 7,394   | 28,681  |
| 21 | 9,660   | 38,341  |
| 24 | 12,741  | 51,082  |
| 27 | 16,928  | 68,010  |
| 30 | 22,619  | 90,629  |
| 33 | 30,354  | 120,983 |
| 36 | 40,868  | 161,850 |
| 39 | 55,158  | 217,008 |
| 42 | 74,581  | 291,589 |
| 45 | 100,981 | 392,570 |
| 48 | 136,864 | 529,433 |

replaceme P = C+M(1 Total Cost  
year (1+i (cum P)

|    |         |         |
|----|---------|---------|
|    | 2,085   | 2,085   |
| 5  | 2,753   | 4,839   |
| 10 | 3,868   | 8,706   |
| 15 | 5,727   | 14,433  |
| 20 | 8,826   | 23,260  |
| 25 | 13,996  | 37,256  |
| 30 | 22,619  | 59,875  |
| 35 | 36,999  | 96,874  |
| 40 | 60,982  | 157,856 |
| 45 | 100,981 | 258,837 |

cost compar

| Remaining<br>Design Life | timber       | timber       | plastic<br>no recyle | plastic<br>no recyle | plastic<br>recyle | plastic<br>recyle |
|--------------------------|--------------|--------------|----------------------|----------------------|-------------------|-------------------|
|                          | 3 yr<br>(\$) | 5 yr<br>(\$) | 10<br>(\$)           | 25<br>(\$)           | 10<br>(\$)        | 25<br>(\$)        |
| 10                       | 11,060       | 4,839        | 4,387                | 4,387                | 4,161             | 4,161             |
| 20                       | 28,681       | 14,433       | 8,775                | 4,387                | 8,322             | 4,161             |
| 30                       | 68,010       | 37,256       | 13,162               | 8,775                | 12,483            | 8,322             |
| 40                       | 217,008      | 96,874       | 17,549               | 8,775                | 16,644            | 8,322             |
| 50                       | 529,433      | 258,837      | 21,937               | 8,775                | 20,805            | 8,322             |

platic 25 yr. vs. timber 3 yr.

| Remaining<br>Design Life | cost savings per pile |         | cost savings per pile |         |
|--------------------------|-----------------------|---------|-----------------------|---------|
|                          | no recyle             | %       | recycle               | %       |
|                          | pw \$                 | savings | pw \$                 | savings |
| 10                       | 6,673                 | 60.3%   | 6,899                 | 62.4%   |
| 20                       | 24,293                | 84.7%   | 24,520                | 85.5%   |
| 30                       | 59,235                | 87.1%   | 59,688                | 87.8%   |
| 40                       | 208,233               | 96.0%   | 208,686               | 96.2%   |
| 50                       | 520,659               | 98.3%   | 521,112               | 98.4%   |

platic 25 yr vs. timber 5 yr.

| Remaining<br>Design Life | cost savings per pile |         | cost savings per pile |         |
|--------------------------|-----------------------|---------|-----------------------|---------|
|                          | no recyle             | %       | recycle               | %       |
|                          | pw \$                 | savings | pw \$                 | savings |
| 10                       | 451                   | 9.3%    | 678                   | 14.0%   |
| 20                       | 10,046                | 69.6%   | 10,273                | 71.2%   |
| 30                       | 28,481                | 76.4%   | 28,934                | 77.7%   |
| 40                       | 88,099                | 90.9%   | 88,552                | 91.4%   |
| 50                       | 250,062               | 96.6%   | 250,515               | 96.8%   |

## timber 3 year life

| facility<br>remaining<br>life | timber<br>(3 yrs) | plastic-no recycle<br>(10) yrs | plastic-no recycle<br>(25) yrs | savings<br>plastic<br>no recycle<br>10 yrs | savings<br>plastic<br>no recycle<br>25 yrs |
|-------------------------------|-------------------|--------------------------------|--------------------------------|--|--|
| 10                            | 2,085             | 4,387                          | 4,387                          | -2,302                                     | -2,302                                     |
| 10                            | 4,530             | 4,387                          | 4,387                          | 142  | 142  |
| 10                            | 7,463             | 4,387                          | 4,387                          | 3,076                                      | 3,076                                      |
| 10                            | 11,060            | 4,387                          | 4,387                          | 6,673                                      | 6,673                                      |
| 20                            | 15,560            | 8,775                          | 4,387                          | 6,785                                      | 11,173                                     |
| 20                            | 21,287            | 8,775                          | 4,387                          | 12,512                                     | 16,899                                     |
| 20                            | 28,681            | 8,775                          | 4,387                          | 19,906                                     | 24,293                                     |
| 30                            | 38,341            | 13,162                         | 4,387                          | 25,179                                     | 33,954                                     |
| 30                            | 51,082            | 13,162                         | 4,387                          | 37,920                                     | 46,695                                     |
| 30                            | 68,010            | 13,162                         | 8,775                          | 54,848                                     | 59,235                                     |
| 40                            | 90,629            | 17,549                         | 8,775                          | 73,079                                     | 81,854                                     |
| 40                            | 120,983           | 17,549                         | 8,775                          | 103,433                                    | 112,208                                    |
| 40                            | 161,850           | 17,549                         | 8,775                          | 144,301                                    | 153,076                                    |
| 40                            | 217,008           | 17,549                         | 8,775                          | 199,459                                    | 208,233                                    |
| 50                            | 291,589           | 21,937                         | 8,775                          | 269,652                                    | 282,814                                    |
| 50                            | 392,570           | 21,937                         | 8,775                          | 370,633                                    | 383,795                                    |
| 50                            | 529,433           | 21,937                         | 8,775                          | 507,497                                    | 520,659                                    |

## timber 5 yr life

| timber<br>(5 yrs) | plastic-recycle<br>(10 yrs) | plastic-recycle<br>(25 yrs) |
|-------------------|-----------------------------|-----------------------------|
| 2,085             | 4,161                       | 4,161                       |
| 4,839             | 4,161                       | 4,161                       |
| 8,706             | 8,322                       | 4,161                       |
| 14,433            | 8,322                       | 4,161                       |
| 23,260            | 12,483                      | 4,161                       |
| 37,256            | 12,483                      | 8,322                       |
| 59,875            | 16,644                      | 8,322                       |
| 96,874            | 16,644                      | 8,322                       |
| 157,856           | 20,805                      | 8,322                       |
| 258,837           | 20,805                      | 8,322                       |